

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>A61M 37/00</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 99/39763</b> <b>(43) International Publication Date:</b> 12 August 1999 (12.08.99)
<b>(21) International Application Number:</b> PCT/US99/02701 <b>(22) International Filing Date:</b> 9 February 1999 (09.02.99)  <b>(30) Priority Data:</b> 60/074,231 10 February 1998 (10.02.98) US 09/114,810 13 July 1998 (13.07.98) US  <b>(71) Applicant:</b> CHILDREN'S MEDICAL CENTER CORPORATION [US/US]; 300 Longwood Avenue, Boston, MA 02115 (US).  <b>(72) Inventors:</b> ATALA, Anthony; 74 Westerly Road, Weston, MA 02193 (US). MACHLOUF, Marcelle; 34a Harvard Avenue #2, Brookline, MA 02146 (US).  <b>(74) Agents:</b> HANLEY, Elizabeth, A. et al.; Lahive & Cockfield, LLP, 28 State Street, Boston, MA 02109 (US).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
<b>(54) Title:</b> ULTRASOUND-MEDIATED DRUG DELIVERY  <b>(57) Abstract</b>  Methods and apparatus are disclosed for treating physiological problems, and for providing rapid, efficacious transdermal treatment, for example, of muscle sprains, erectile dysfunction, or baldness, without requiring the use of needles or other invasive interventions. A topical therapeutic agent and ultrasound energy are applied to a tissue surface, e.g., the skin, such that the ultrasound enhances transdermal penetration of the agent. The invention is especially useful in localized delivery of a controlled dosage of a therapeutic agent to the small blood vessels and capillaries beneath the skin's surface.		

**BEST AVAILABLE COPY**

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## ULTRASOUND-MEDIATED DRUG DELIVERY

### Background of the Invention

The technical field of this invention is medical treatments and devices. In particular, medical methods and devices are disclosed for enhancing transcutaneous absorption of drugs. The invention is useful for a variety of purposes, including the treatment of muscle sprains and inflammation, treatment of male erectile dysfunction, treatment of hereditary baldness and other applications.

Muscle sprains typically occur when over-exercise or a traumatic event causes a joint to move beyond its normal range of motion and tissues of the muscle's tendons or ligaments are torn or stretched. The results of such sprains are typically rapid swelling, tenderness or pain, and/or impaired joint function. The treatment of muscle sprains usually involves applying ice to the affected region, rest and aspirin or other analgesic agents. Only in serious cases are stronger anti-inflammatory drugs recommended because they must be applied systemically (e.g., orally) or by injection. The use of topical analgesics and/or topical anti-inflammatory agents is considered of marginal effectiveness, despite the plethora of products sold as over-the-counter pain relief agents. Topical agents are largely unable to pass transdermally to the capillary beds that surround the afflicted tissue and, hence, usually can not deliver an sufficient dosage of the medication to the site of injury.

Erectile dysfunction is a common medical problem among men. The incidence increases with age and other medical disorders such as diabetes mellitus. The dysfunction is characterized by an inability to obtain a penile erection or to sustain an erection. Several vasoactive drugs have been tried for the clinical evaluation and treatment of impotence. Among them, papaverine and prostaglandin E1 (PGE 1) are the most widely used. These agents are strong smooth muscle relaxants, which can induce penile erection after intracorporal injection (intracavernosal therapy). However, intracavernosal injections have several side effects. Repeated injections can cause fibrosis of the penile shaft and priapism (prolonged erection). Moreover, this therapy has associated disadvantages such as discomfort, pain, and injection anxiety, which can result in patient rejection of the therapy and/or a less than optimal level of satisfaction even when erection is achieved.

Recently, a new class of drugs have been greeted with considerable enthusiasm. These drugs, known as phosphodiesterase type 5 inhibitors, block a phosphodiesterase enzyme that functions to break down the chemical GMP, produced during sexual stimulation. By ensuring that GMP remains in the penile tissue and surrounding blood vessels, these inhibitors help initiate and maintain an erection. The first of this new class

- 2 -

of drugs, sildenafil (sold by Pfizer under the trademark Viagra™) has already become widely prescribed. Unfortunately, the drug must be taken systemically and many subjects have reported side effects such as headaches, nausea and facial flushing and indigestion.

5       The transdermal application of vasoactive drugs for treatment of erectile dysfunction has been studied *in vitro* and *in vivo*. While transdermal application avoids certain of the disadvantages of injection, transdermal therapies to date have been associated with limited success. The side effects of sildenafil and other enzyme inhibitors, as well as, systemic vasoactive drugs could be diminished significantly, if a  
10       suitable transdermal delivery mechanism was available because the necessary doses could be lowered and the drugs would be less likely to affect remote body organs.

Hereditary baldness usually occurs in men and is characterized by a gradual thinning of the hair, generally, and a receding hairline. Over time the recession continues until the individual is left with a horseshoe like pattern of hair around the sides  
15       of the head. Recently, the drug minoxidil (originally developed to treat high blood pressure) has been found to inhibit hairline recession and, in some cases, stimulate new hair growth. The drug is now sold as a over-the-counter product, usually in the form of a topical lotion. Although the mechanism of action is not fully understood, it appears that the drug stimulates the activity of dormant hair papilla, causing the hair roots to grow a  
20       new shafts through their follicles. Again, the effectiveness of this therapy is limited by the ability to topically deliver sufficient amounts of the drug to the papilla and surrounding beds of blood vessels.

There exists a need to better transdermal drug delivery systems, for the treatment of physiological problems generally, and for the treatment of muscle sprains, erectile  
25       dysfunctions, and baldness, in particular. Systems and methods that can improve the effectiveness of existing agents and/or permit systemic agents to be delivered locally would satisfy a long-felt need in the art.

### **Summary of the Invention**

30       Methods and apparatus are disclosed for treating physiological problems, and for providing rapid, efficacious transdermal treatment of treatment of muscle sprains, erectile dysfunctions, and baldness, in particular, without requiring the use of needles or other invasive interventions. The present invention applies both a topical therapeutic agent and ultrasound energy to a tissue surface, such as the skin, such the ultrasound  
35       enhances transdermal penetration of the agent. The invention is especially useful in localized delivery of a controlled dosage of a therapeutic agent to the small blood vessels and capillaries beneath the skin's surface.

In one aspect, the invention provides a method for treatment of muscle sprains and other superficial tissue inflammations. The method includes the steps of contacting the skin surface of a subject in need of such treatment with an effective amount of an agent capable of treating the inflammation, and applying ultrasound energy to the skin surface, such that ultrasound-mediated drug absorption occurs and the inflammation is treated. Agents useful in treatment of muscle sprains include analgesics, anti-inflammatory agents, cortisone derivatives and other steroids.

In another aspect, the invention provides a method for treatment of erectile dysfunction. The method includes the steps of contacting the skin surface of a subject in need of such treatment with an effective amount of an agent capable of treating erectile dysfunction, and applying ultrasound energy to the skin surface, such that ultrasound-mediated drug absorption occurs and the erectile dysfunction is treated. Agents capable of treating erectile dysfunction include recently developed enzyme inhibitors, such as sildenafil or alprostadil, as well as more traditional vasoactive agents, such as papaverine, minoxidil, prostaglandins, organic nitrites, inhibitors of the renin-angiotensin system, and inducible Nitric Oxide Synthase (iNOS) agents.

In yet another aspect, the invention provides a method for treatment or prevention of hair loss. The method includes the steps of contacting the skin surface of a subject in need of such treatment with an effective amount of an agent capable of inducing hair growth, and applying ultrasound energy to the skin surface, such that ultrasound-mediated drug absorption occurs and the hair papilla are stimulated. Agents useful in controlling hair loss include minoxidil, finasteride, fabao-101, cyproterone acetate, ethinyl estradiol, aldactone and spironolactone. More generally, the invention is useful for treatment of hair loss with anti-androgen therapies (e.g., localized delivery of therapeutic agents designed to block the enzymatic conversion of testosterone into dihydrotestosterone(DHT)) and/or vasodialator therapies design to increase blood flow to the follicle roots.

Transdermal administration of drugs, such as cortisone derivatives, sildenafil, papaverine and minoxidil (among others) can offer a safe, non-painful alternative to previously known therapies. However, conventional transdermal application of such drugs has met with reduced success, possibly due to the stratum corneum layer of the skin, which is resistant to drug penetration through the skin to the underlying tissues such as torn ligaments, tendons, muscle tissue, the corpus cavernosum of a penis, and/or the papillae and surrounding structures of hair follicles.

In one aspect of the apparatus, the invention provides a device for the treatment of muscle sprains and the like. The device include means for applying an effective amount of an agent capable of capable of treating the muscle aliment to a tissue surface

- of a subject, and ultrasound means, operatively coupled to the means for applying the drug, for promoting transdermal absorption of the drug through the tissue of the subject. In one embodiment, the device has the form of a hand held instrument. The means for applying a drug can be a reservoir which contains the drug, and, optionally, a
- 5 physiologically-acceptable carrier or excipient. The reservoir can be of the type employed in conventional transdermal patch applications or it can be one specially designed to be integrated with the hand-held ultrasound applicator. The applicator can also include a slot, reservoir, or space for receiving a (preferably replaceable) source of the therapeutic agent, and a compliant skin contacting surface.
- 10 In another aspect of the apparatus, the invention provides a device for the treatment of erectile dysfunction. The device includes means for applying an effective amount of an agent capable of treating erectile dysfunction to a tissue surface of a subject, and ultrasound means, operatively coupled to the means for applying the drug, for promoting transdermal absorption of the drug through the tissue of the subject.
- 15 In a preferred embodiment, the device has the form of a ring or torus adapted for fitting to the penis of the subject. The means for applying a drug can again be a reservoir which contains the drug, and, optionally, a physiologically-acceptable carrier or excipient; the reservoir can be of the type employed in conventional transdermal patch applications. The device can also include a slot, reservoir, or space for receiving a
- 20 (preferably replaceable) source of the drug. For example, the device can include a well for receiving a portion of a drug formulation, such as a cream or ointment, or a slot for receiving a disposable reservoir, such as a patch, which can be inserted before the device is used, and then removed and, optionally, discarded after use.

For erectile dysfunction treatment, the device is preferably small in size, such

25 that it can be unobtrusively placed over the flaccid penis. After penile erection is achieved through use of the device, the device can be removed. However, in one embodiment, the device can be small enough such that it will not interfere with sexual intercourse and need not be removed. In certain embodiments, the ultrasound source is powered by batteries carried within the body of the device. The batteries can be of the

30 type used for powering microelectronic devices, such as hearing aids, thereby preserving the small size of the device.

The invention also provides systems for applying an effective amount of an agent capable of treating erectile dysfunction to the skin of the penis and means for applying ultrasound energy to the same skin region. The drug dispenser can comprise a

35 condom having a coating of an active agent on an interior surface; a patch containing the active agent, analogous to conventional transdermal patches for the delivery of drugs such as scopolamine and nicotine; an applicator adapted for placement on or over the

- 5 -

penis of the subject, having a surface impregnated with an active agent, or a reservoir containing the active agent. The applicator can further include means for dispensing the agent, preferably at a controlled rate, to the subject's skin; and other like means for delivering the drug to the subject.

5           In one illustrated embodiment, the means for applying the active agent includes a penile device which is placed around the penis to deliver the drug and the required ultrasound energy for appropriate drug delivery is applied with a hand held applicator. For example, a drug permeated transdermal patch can be placed in direct contact with the penile skin, and an ultrasound-producing device is placed over the patch. After a  
10           suitable time period, e.g., a few minutes, the ultrasound applicator and the patch are removed, exposing the erect phallus.

          The devices and systems of the invention can also be provided with means for determining the erectile state of the penis, e.g., for detecting detumescence or loss of erection. Such means include a pressure-sensitive mechanical switch such as described  
15           previously, or an imaging ultrasound receiver for determining blood flow or penile erection. In the event of detumescence, ultrasound energy can be applied to promote renewed penile erection.

          According to the methods of invention, an agent capable of treating erectile dysfunction, e.g., an agent capable of promoting penile erection, such as a smooth  
20           muscle relaxant, is applied to a tissue surface, e.g., the skin of the patient, preferably on the penis itself, e.g., the glans or, more preferably, the shaft of the penis (or both the glans and the shaft, e.g., as when a condom containing the active agent is used). It will be appreciated, however, that the agent can be applied in other ways, e.g., intra-urethrally. In certain embodiments, the active agent can be applied to other skin  
25           surfaces, e.g., any skin surface, which will permit an effective amount of the drug to penetrate the skin and reach the penile tissues such that penile erection is promoted. An active agent can also be applied to any skin surfaces in addition to than the penis, if desired (e.g., to provide greater skin surface area for drug penetration). The agent can be any compound which can be applied to a tissue surface of the subject and which can  
30           promote penile erection. The drug agent can be applied to the skin by topical administration, e.g., by applying a cream, lotion, gel or other formulation which includes an active agent, to the skin before or during the application of ultrasound to the affected area. In certain embodiments, the drug can be applied by contracting the skin with a device which includes a coating or layer of the drug disposed thereon such that the drug  
35           is applied to the skin. A band, sheath, condom, patch, or other carrier having a skin-contacting surface can be coated with an active agent, such that the drug is applied to the skin of the user.

For example, in one embodiment, the subject administers the drug by rolling a condom onto the flaccid penis; the condom is coated on at least a portion of the interior surface thereof with an active agent (which can be formulated in a base including conventional lubricants, emollients, or other ingredients known in the art). The condom  
5 is worn for a period of time sufficient to ensure adequate application of the active agent to the skin of the subject. The condom can then be removed and ultrasound energy applied to the penis of the user; alternatively, in certain embodiments, the ultrasound energy can be provided to the penis while the condom is still worn, e.g., by application through the condom to the penis. In either case, application of ultrasound energy  
10 promotes penile erection by increasing the bioavailability of the active agent to the underlying tissues of the penis, such as the corpus cavernosum. In embodiments in which a condom is employed, the condom can be removed before sexual intercourse or alternatively can be worn during intercourse.

Therapeutic agents useful for treatment of erectile dysfunction include, without  
15 limitation, sildenafil, alprostadil, papaverine, minoxidil, prostaglandins, such as prostaglandin E2 (see, e.g., U.S. Patent 5,708,031 for formulations of prostaglandins useful for topical application to the penis), organic nitrites (see, e.g., U.S. Patent 5,646,181 for useful organic nitrites and formulations thereof), inhibitors of the renin-angiotensin system (see, e.g., U.S. Patent 5,658,936), and/or inducible Nitric Oxide  
20 Synthase (iNOS) agents (see, e.g., U.S. Patent 5,594,032) or combinations of such compounds as well as other compounds known to those of ordinary skill in the art. (The teachings of each of the cited patents are incorporated herein by reference.) Mixtures of active agents can also be employed.

In yet another aspect of the apparatus, the invention provides a device for the  
25 treatment of hair loss. The device can include means for applying an effective amount of an agent capable of treating the hair loss to the scalp, or other affected region of a subject, and ultrasound means, operatively coupled to the means for applying the drug, for promoting transdermal absorption of the drug through the tissue of the subject. In one embodiment, the device has the form of a hand held instrument. The means for  
30 applying a drug can be a reservoir which contains the drug, and, optionally, a physiologically-acceptable carrier or excipient. The reservoir can be of the type employed in conventional transdermal patch applications or it can be one specially designed to be integrated with the hand-held ultrasound applicator. The reservoir can take the form of a scalp cap which is fitted over the affected area. The applicator can also  
35 include a slot, reservoir, or space for receiving a (preferably replaceable) source of the therapeutic agent. Alternatively the agent can be applied manually (e.g., massaged into the scalp).



The therapeutic agent for treatment of hair loss can be, without limitation, compounds such as minoxidil, finasteride, fabao-101, cyproterone acetate, ethinyl estradiol, aldactone and spironolactone. More generally, the agent can be an anti-androgen therapeutic agent (designed to block the enzymatic conversion of testosterone into dihydrotestosterone(DHT)) and/or a vasodilator designed to increase blood flow to the penile blood vessels.

The methods and systems of the invention can also include additional means for enhancing transdermal penetration or absorption of an active agent. For example, enhancers of transdermal drug absorption have been used to increase the efficacy of other transdermal drug administration modalities, such as transdermal skin patches and the like. Permeation enhancers which can be useful in the present invention include dimethylsulfoxide related compounds (DMSOs), 1,3-dioxacycloalkanes (SEPs), amphoteric cations and anions, fatty acids (and their esters), fatty alcohols (and their ethers), glycols, alcohols, acetones, ketones and other organic solvents, as well as other known permeation enhancers that increase the rate or amount of active agent transported across the dermal barrier.

The ultrasound applicator preferably comprises a power source (such as a battery or transformed household current) and at least one ultrasound transducer capable of providing ultrasound energy at a frequency of between 20 kHz and 5 MHz and a power of about 0.02 to about 3 watts/cm<sup>2</sup>. (Ultrasound sources are described in more detail *infra*). The ultrasound applicator can further include suitable control circuitry for generating complex waveforms, amplitude variations, frequency variations, constructive interference and other functional controls on the ultrasonic therapy.

The devices and systems are also preferably provided with means for switching the ultrasound source on and off at appropriate intervals, e.g., for switching on the ultrasound source to promote penile erection, after which the ultrasound source is switched off, e.g., to preserve battery life. The means can be a mechanical switch which the user can actuate at the requisite intervals, or, more alternatively, can be a timer or microprocessor-controller switch which is set or programmed before use to provide the appropriate power levels and duration. In a further embodiment, the switch can be mechanically actuated, e.g., in response to tumescence of the penis, to thereby discontinue application of the ultrasound energy when the penis has become erect. In this embodiment, the switch can include a pressure-sensitive switch member proximal to a surface of the device which contacts the penis when penile erection is achieved. Thus, upon erection of the penis, the switch is actuated and the ultrasound source is switched off. In addition to preserving battery life, by switching off the ultrasound source,

excessive stimulation of erection is avoided, thereby avoiding priapism or other conditions which could cause user discomfort.

Thus, the present invention provides a more effective treatment particularly adapted to pathological or physiological conditions where it is desirable to apply a drug  
5 to a local region below but in close proximity to the stratum corneum layer of the skin. The invention allows drugs to diffuse quickly, and to be rapidly taken up by the subsurface localized blood capillary networks, while at the same time does not inactivate the drug molecules, damage healthy epidermis, cause pain or have toxicologic side effects.

10 It has also been discovered that ultrasound frequencies ranging between about 500 kHz and about 3 MHz can promote the therapeutic effect of topically applied agents. Although the mechanical action is not yet clear, and without intending to be bound by any particular theory, ultrasound effects are often classified into two major categories; thermal and non thermal. Cavitation is one of the major non thermal effects, in which  
15 microscopic air pockets are created and oscillated within the tissue upon exposure to the acoustic field. The energy produced by this phenomenon is partially (10-15%) radiated as an acoustic field, whereas most of it is transformed to heat, shock wave or hydrodynamic shear fields, partially disrupting biological tissue.

The occurrence of cavitation depends mainly upon ultrasound frequencies and  
20 intensities. By appropriate control of the cavitation phenomenon, significantly higher doses of therapeutic agents can be transported across the stratum corneum. In addition, induced cavitation can serve a two-fold purpose in the administration of minoxidil and other hair loss treatment agents by not only enhancing skin penetration of the agent but also by opening the hair follicles and driving the therapeutic agent into contact with the  
25 papilla through the lumens of the follicles.

For example, a male human subject can use a device of the invention, including an adjustable band or strap and an ultrasound source with a drug reservoir, as follows. Prior to sexual intercourse, the user places an effective amount of the drug, e.g., in the form of a patch containing a therapeutic agent, into a slot in the housing of the  
30 ultrasound source. The device is then secured to the user's flaccid penis by placing the adjustable band around the shaft of the penis such that the drug patch is in contact with the skin of the penis. The user then presses a button to activate the ultrasound source; the device includes a timer which automatically provides ultrasound energy for two minutes, at a frequency of about 20 kHz and a power of about  $0.2 \text{ W/cm}^2$ ; and in a duty  
35 cycle of about 20%. the drug is effective to promote an erection after application of the ultrasound energy. The device can then be removed from the penis. If the user should experience loss of erection, the device can be used again to promote another erection. If

necessary, a fresh drug patch can be provided to ensure that an effective amount of drug is used.

Accordingly, novel therapies have been discovered in which ultrasound waves, of different frequencies and/or intensities, are used to enhance transdermal delivery of pharmaceutical agents. Ultrasound-induced cavitation provides a non painful method for enhancing drug delivery with few or no side effects.

Most generally, the invention provides methods for transdermal therapy that include the step of contacting a tissue surface (e.g., the skin surface) of a subject in need of such treatment with an effective amount of an agent capable of treating the physiological condition, and the step of applying ultrasound energy to the tissue surface, such that the condition is treated (e.g., by ultrasound-mediated drug absorption). The term "subject," as used herein, includes mammals, including humans as well as non-human animals such as cats, dogs, horses, pigs, goats, sheep, and non-human primates. In certain embodiments, the step of contacting can include applying the active agent to the tissue surface with a patch or a sheath or condom coated with or otherwise impregnated with the active agent. In other embodiments, the agent can be applied with other devices or systems, e.g., as described herein. The tissue surface is preferably a skin surface, e.g., the skin surrounding a torn muscle, the skin of the penis, or the scalp. Other tissue surfaces, such as the interior of the urethral or vaginal openings, the mouth, and ears can also be contacted with an active agent and treated according to the methods of the invention.

In a further aspect, the invention provides devices, systems and kits for the treatment of physiological problems. The devices include an ultrasound transducer for promoting transdermal absorption of the drug through the skin of the subject. In one embodiment, the device has the form of a hand held sonicator. In another embodiment, the device can take the form of a belt-like structure adapted to fit around a body limb or the penis or the head of the subject. In yet another embodiment the system (or applicator component) can take a sheath-like or scalp-cap shape.

The applicator means for applying a drug can be a reservoir which contains the drug, and, optionally, a physiologically-acceptable carrier or excipient, or a transdermal penetration enhancer. The reservoir can be fluidically coupled via a flow regulator, to the treatment site. Alternatively, the applicator can be constructed like a conventional transdermal patch applications or it can be specifically designed to fit within a hand held housing. In the case of penile therapies the reservoir can be take the form of a condom. In the case of hair loss therapies the reservoir can be take the form of a scalp or skull cap. In other applications, drug can simply be applied to the tissue as a gel or lotion, or

the ultrasound transducer can include an applicator for applying a drug to a skin surface of a subject.

The ultrasound means preferably comprises a power source (such as a replaceable or rechargeable battery, or a transformer for utilization of household current) and at least one ultrasound transducer capable of providing ultrasound energy at a frequency of between about 20kHz and about 3 MHz. In some applications it can be desirable to modulate the frequency using a preprogrammed tuner to alter the frequency over time to enhance microcavitation effects (and other mechanisms of transdermal transport) through the skin. Similarly, the use of two or more transducers (or wave reflectors) can be desirable to induce constructive interference patterns that likewise enhance the skin-penetration rates.

The ultrasound source can be of any suitable design, e.g., a design such as certain ultrasound sources known in art. For example, ultrasound probes used in Doppler sonography are well known, and, by generating appropriate ultrasound frequencies and energies as described herein, can be used in the methods, devices, and systems of the present invention.

The ultrasound source is preferably connected to a power supply and to suitable control means for regulating the ultrasound signal produced by the ultrasound source. The power supply and control means (e.g., circuitry) can be disposed within or external to a body-contacting portion of a device or system of the invention, and is operatively connected to the ultrasound source, e.g., by means of wires running from the ultrasound source, to the power supply and control means. The control means can be provided with a user interface for setting parameters such as the power, duty cycle, and pulse duration of the ultrasound energy provided by the ultrasound source. Suitable control means will appear to one of ordinary skill in the art. It will be appreciated that an ultrasound transducer such as a piezoelectric crystal can also be operated as a receiver for ultrasound waves reflected from tissue surrounding the transducer. Thus, the control means can be provided with appropriate receiver circuitry to provide monitoring capability to the systems of the invention. Such monitoring capability can be used by the systems or devices of the invention in a feedback control loop, e.g., for determining when penile erection has been achieved or blood flow to the penis has been enhanced.

#### **Brief Description of the Drawings**

The foregoing and other aspects of the present invention will be appreciated with reference to the detailed description of the invention which follows, which read in conjunction with the accompanying drawings wherein:

- 11 -

FIG. 1 is a schematic, perspective illustration of an ultrasound applicator for mediating drug delivery according to the invention;

FIG. 2 is a partially cross-sectional side view of the transducer head of the apparatus of FIG. 1;

FIG. 3 is a schematic, perspective view of a drug dosage dispenser for use in conjunction with the transducer head assembly of FIG. 2;

FIG. 4 is a schematic, perspective illustration of an alternative embodiment of an ultrasound-mediated drug delivery apparatus according to the invention;

FIG. 5 is a schematic, cross-sectional front view of the apparatus of FIG. 4;

FIG. 6 is a top view of the drug receptacle assembly of the apparatus of FIG. 4;

FIG. 7 is a schematic illustration of a dosage dispenser for use in connection with the apparatus of FIG. 4;

FIG. 8 is a schematic side view of an ultrasound applicator coupled to the apparatus to FIG. 4;

FIG. 9 is another alternative embodiment of the invention, employing a belt and integrated ultrasound transducer arrangement;

FIG. 10 is another alternative embodiment of the invention, employing a condom-like sheath and a toroidal ultrasound transducer arrangement;

FIG. 11 is a cross-sectional top view of the apparatus of FIG. 10;

FIG. 11A is a schematic illustration of constructive interference patterns treated by multiple transducers disposed in the toroidal arrangement of FIG. 11;

FIG. 12 is a schematic block diagram of an ultrasound transducer control system according to the invention; and

FIG. 13 is a graph of amplitude versus time, illustrating a variable frequency protocol for the application of ultrasound to enhance transdermal penetration, according to the invention.

## 5 Detailed Description of the Invention

FIG. 1 illustrates a system 10 for ultrasound-mediated drug delivery, including a hand held probe 12, a transducer head assembly 14, a therapeutic agent dispenser 16, control switch 18 and an optional power cord 32 for connection to an external power source and/or auxiliary control circuitry.

10 In FIG. 2, a partially cross-sectional view of transducer head assembly 14 of FIG. 1 is shown including an ultrasound transducer 20 which can be formed by piezoelectric elements 22 and 24. Electrical lead wires 30A and 30B provide power and, optionally, a modulation or frequency control signals to the transducer elements. The electrical leads (or separate circuitry) can also carry feedback control signals picked-up  
15 by the transducers (in a monitoring mode) and convey such signals back to a controller (as discussed below). In addition, the body 26 of the transducer head can be constructed of a compliant polymeric material in order to conform to the tissue surface undergoing treatment, and can also include an internal cavity having walls 28 that reflect and/or focus the ultrasound energy to a desired site beneath the applicator. The transducer head  
20 assembly, in use, can also include a dosage dispenser 16 which applies the topical agent to the skin where transdermal penetration is desired. As shown in FIG. 2, the body of the transducer head assembly 26 can further include a snap-on coupler (e.g., a ring-like ridge) to facilitate coupling of the dosage dispenser 16 to the head assembly 14.

FIG. 3 provides a further illustration of a drug dosage dispenser 16 for use in  
25 conjunction with the transducer head assembly of FIG. 2. The dosage dispenser 16 includes a semi-rigid casement 36 having a rim or ridge coupler 38 which cooperates with the mating element 34 on the transducer head assembly to deploy and secure the dosage dispenser. The dosage dispenser 16 further includes a therapeutic agent 40, possibly together with additional physiologically-acceptable carriers, solvents or  
30 transdermal enhancing agents. The dispenser 16 of FIG. 3 can further include a peel off covering (not shown) to maintain sterility of the therapeutic agent until it is applied to the skin. The drug dispenser 16, if a snap-in coupling is employed, can also include one or more tab elements (not shown), to assist in detachment of the dispenser following the ultrasound-mediated therapy.

35 In FIG. 4 an alternative embodiment particularly useful in treating erectile dysfunction. The system 10B of FIGS. 4-8 includes a belt 42 which facilitates placement of the device around the penis of a subject. Connected to the belt 42 is a drug

- 13 -

dispenser housing 44. The system can further include a cinch mechanism 46 to hold the system in contact with the subject's skin. Alternatively, the belt element can be a strap, optionally provided with an adjustment means, such as a slidable clasp, or other adjustable closure, for adjusting the fit of the device. Belt 42 can also be a band of an elastic material sized to provide a conforming fit for the user.

As shown in more detail in FIGS. 5, 6 and 7 the drug dispenser housing 44 can include walls 48 which define a receptacle 52 for a therapeutic agent 40B. The agent can be delivered as a gel or as a semi-solid block of medication. Alternatively, therapeutic agent 40B can be delivered in a dispenser casement similar to that described above in connection with the embodiment of FIGS. 1-3.

The apparatus 10B of FIGS. 4-7 is designed to cooperate with a ultrasound applicator as shown in FIG. 8. The applicator includes a transducer head assembly 14B which is sized and shaped to couple with the receptacle 52 or drug dispenser housing 44. When the therapeutic agent 40B is disposed within the receptacle, in contact with the skin, the ultrasound applicator and transducer head 14B can then be applied to agent 40B or housing 44 to effect transmission of ultrasonic waves (and penetration of the agent) through the skin as shown in FIG. 8.

Another embodiment of a device of the invention is depicted in FIG. 9. As shown in FIG 9, the device 10C can include an attachment means 43 for securing a miniaturized ultrasound source 14C to the penis of a user. Attachment means 43 can be a strap or an elastic band or belt similar to the belt and cinch mechanism described above in connection with the embodiment of FIGS. 4-8. Ultrasound source 14C includes a housing 27 for containing an ultrasound transducer, microelectronic circuitry suitable for controlling the operation of the ultrasound transducer, and, preferably, a power source such as a battery. The housing 27 is preferably constructed of a strong, durable, preferably compliant material; e.g., a plastic material such as a polyethylene, silicone or polyurethane composition, which advantageously also provides electrical insulation to protect the user against electrical shock.

In the embodiment of FIG. 9, housing 27 is provided with a slot 29 for receiving a source of the drug to be applied to the skin of the user. The drug composition, such as a gel or cream, can be dispensed by the user into the slot 29 before the device is used. In another embodiment, the drug is adsorbed or contained in unit dosage form as a patch, e.g., a transdermal patch, and the patch is sized to releasably and replaceably fit within slot 29. In such an embodiment, the patch is preferably designed for one-time use, with a suitable single dose of the active agent, and then discarded after use. This embodiment provides a reliable metering of the drug and is convenient and simple to use while maintaining appropriate cleanliness of the device. The miniaturized device of FIG. 9 is

- 14 -

preferably light weight and can, in one embodiment, present a rounded shape and low profile so as to not interfere with sexual intercourse. The device 10C can also be integrated into, or otherwise coupled to, a condom, if desired.

The embodiment of FIG. 9 depicts ultrasound source 14C with switch means 18  
5 for controlling operation of the device, e.g., an on/off switch. The device can also be provided with one or more additional buttons 19 for allowing the user to adjust the operating parameters of the device (e.g., the frequency, duty cycle, or duration of the ultrasound energy application). The device 10C can further include one or more  
10 pressure transducers 21 to monitor the tumescence of the penis, thereby allowing discontinuance of the ultrasound energy when the penis has become erect (or reinitiation or the system in the event that the erection is lost).

FIG. 10 illustrates yet another alternative system 10D for ultrasound-mediated drug delivery. The system 10D of FIG. 10 includes a toroidal transducer head assembly 14D having an hollow interior 60. The transducer assembly 14C can be activated by on-  
15 board batteries and/or a microprocessor element incorporated into the body of the transducer assembly 14D. Alternatively, an external power supply and/or external control circuitry can be applied to the device via electrical connection 32. As shown in more detail in FIGS. 10 and 11, the system 10C is designed to cooperate with a ring-like or condom-like sheath which is first applied to the penis. The sheath 56 includes a skin  
20 58 and an internal coating of the therapeutic agent 40C. As illustrated in FIG. 10, the therapeutic agent can coat most or all of the sheath 56. Alternatively, the therapeutic agent can be confined to that portion of the sheath which is disposed between the transducer assembly 14 and the penis. In FIG. 11 a toroidal arrangement of transducer elements 20C is illustrated. These transducer elements can be coupled together by  
25 electrical leads 30A and 30B. Also shown in phantom in the cross-sectional illustration of FIG. 11 is the sheath element 56 having its internal drug coating.

FIG. 11A illustrates the particular advantage of employing a toroidal arrangement of transducers. FIG. 11 shows a partial toroidal arrangement of transducer elements 20', 20" and 20''' and the interaction of their ultrasonic waves as they propagate  
30 into the stratum corneum. As the waves overlap each other, areas of constructive interference are created to locally increase the magnitude of the wave. This modulation is particularly useful in inducing temporary cavitation, one of the principal mechanisms for ultrasound-mediated transdermal penetration.

FIG. 12 illustrates a control system which can further ensure optimal ultrasound  
35 mediation. The system includes a power supply 60, a variable wave generator 64, stored instructions 65 or user input 66 and a piezoelectric oscillator 68. The system can further include a detector 62 and/or microprocessor 63 to monitor any feedback signals picked



up the piezoelectric oscillator in a receiver-mode and/or provide control signals based on such feedback signals, prestored instructions or user inputs.

FIG. 13 illustrates the advantages of variable frequency ultrasound application. By modulating the frequency between a relatively longer wavelength region 70 and a shorter wavelength region 72, constructive interference can again be induced in the strata corneum, also enhancing cavitation.

The power, frequency, and duty cycle of the ultrasound energy should be selected to be sufficient to promote transdermal penetration of topical applied agents while substantially avoiding undesirable side effects such as heating or disruption of tissue. Thus, in certain embodiments, the ultrasound energy is applied in the frequency range of about 20 kHz to about 5 MHz, more preferably about 100 kHz to about 4 MHz, and still more preferably from about 500k Hz to about 3 MHz, and preferably at a power of about 0.02 to about 3 watts/cm<sup>2</sup>, more preferably about 0.2 to about 2 watts/cm<sup>2</sup>, and still more preferably 0.5 to about 1.5 watts/cm<sup>2</sup>. The ultrasound energy should be applied for a time sufficient to achieve the desired therapeutic result (i.e., treatment of erectile dysfunction) while avoiding tissue damage or discomfort to the subject. For treatment of erectile dysfunction, the time period for application should be relatively short. For other therapies, such a muscle sprains or hair loss therapy, the treatment can be longer. Exemplary time periods for application of ultrasound energy to the tissue of the subject can range from about 1 minute to about 2 hours, more preferably from about 2 minutes to about 1 hour, still more preferably about 5 minutes to about 30 minutes.

The duty cycle of the ultrasound source should preferably be from about 10% to about 60%, more preferably from about 20% to about 50%. It will be appreciated in light of the teaching herein that the power, duty cycle, and frequency of the ultrasound can be varied to achieve a desired therapeutic result without causing tissue damage such as burning. For example, ultrasound at a frequency of about 20 kHz can cause skin burns is applied at excessive power levels for extended periods of time. Thus, when a frequency of 20 kHz is employed, it is preferable to use a duty cycle and power level (e.g., 0.02 W/cm<sup>2</sup>) that will minimize tissue damage. For exemplary details on the construction and operation of ultrasonic applicators the teachings of U.S. Patent No. 5,618,275 issued to Bock on April 8, 1997; U.S. Patent No. 5,421,275 issued to Lipkovker on June 6, 1995; and/or U.S. Patent No. 5,267,985 issued to Shimada et al. on December 7, 1993 are incorporated herein by reference. One of ordinary skill in the art will be able to select appropriate power levels, duty cycles, and frequencies of ultrasound using no more than routine experimentation.

- 16 -

The invention has reduced to practice and the principles of the invention have been proven by animal experiments. In these experiments, male dogs, one year old, were anesthetized and a midline abdominal incision was made from the xyphoid process down to the symphysis pubis. Proceeding slightly lateral to the left side of the penis, the corpus cavernosum was exposed. Two butterfly needles were placed into one of the corpus cavernosum, one proximally and one distally. The proximal needle was used for intracorporal pressure recordings, while saline was infused through the distal needle. Controlled intracorporal blood pressure (without applying any drugs) was monitored and recorded while saline was perfused at a rate of 1.7ml/min. Nude mice skin was used to cover the exposed corpora by stitching it to the dog's incised skin. A gel containing 500 mg papaverine (in a base of polyethylene glycol, methyl paraben, butyl paraben, and butylated hydroxytoluene) was applied on the surface of the nude mice skin followed by the application of an ultrasound probe of 1 MHz, pulse mode 30%, at a power level of 2 w/cm<sup>2</sup>, for 20 min. In the control experiments, papaverine was applied topically without any ultrasound application and the manometric pressure was monitored. The resulting manometric pressure was compared to the control pressure by measuring the time needed to reach the peak pressure and the time needed for the cavernosal pressure to decline to baseline.

Perfusion of the corpora with saline (with no ultrasound or papaverine application) was performed for 15 sec at a rate of 1.7 ml/min. creating a pressure ranging from 150-220 cm. H<sub>2</sub>O. The time needed for this pressure to drop to baseline (0-5) was 30 sec. Perfusion of the corpora with saline after applying ultrasound and papaverine reached the same pressure peak in only 5 sec. Moreover, the pressure declined to baseline in 1.5 minutes. Applying only papaverine (no ultrasound) on the skin for 20 min. gave the same results as in the control experiments, where only saline was perfused.

The experimental results demonstrate an absence of topical effect for papaverine alone; that is, papaverine gel, without application of ultrasound, resulted in no greater pressure readings than the no-drug control. These findings are consistent with the human clinical experience, suggesting that penetration of the drug from the skin surface to the corpus cavernosum is insufficient to provide effective therapy in the absence of an enhancer of drug penetration or absorption. However, the addition of the ultrasound treatment was able to create a rise in pressure which was consistent with erection. Therefore, these results indicate that ultrasound enhanced the permeability of papaverine into the corpus cavernosum tissue, increasing arterial inflow and affecting the resistance to venous outflow. The effects of papaverine were achieved with a 300% improvement in the period of time established as a baseline for the establishment of erection.

- 17 -

Furthermore, the effects were 500% more persistent than with the baseline erection parameters.

The contents of all references, patents, and published patent applications cited throughout this application, including the background, are hereby incorporated by  
5 reference.

Those skilled in the art will recognize, or be able to ascertain using no more than routine experimentation, numerous equivalents to the specific procedures described herein. Such equivalents are considered to be within the scope of this invention and are covered by the following claims.

10 Other embodiments are within the following claims.

**CLAIMS****What is claimed is:**

- 5 1. A device for transdermal administration of topical therapeutic agents, comprising  
an applicator for applying an effective amount of a therapeutic agent to a tissue  
surface of a subject; and  
an ultrasound transducer, operatively coupled to the applicator, for providing  
ultrasound energy to the tissue surface at at least one predetermined  
10 frequency to promote transdermal absorption of the drug through the  
tissue of the subject.
2. The device of claim 1, wherein the ultrasound transducer further comprises at  
least one oscillating element capable of generating ultrasound energy at a frequency of  
15 between 20 kHz and 5 MHz.
3. The device of claim 1, wherein the ultrasound transducer further comprises at  
least one oscillating element capable of generating ultrasound energy at a power of  
about 0.02 to about 3 watts/cm<sup>2</sup>.  
20
4. The device of claim 1, wherein the device further comprises a controller for  
varying the frequency of the ultrasound energy.
5. The device of claim 1, wherein the device further comprises a controller for  
25 varying the power of the ultrasound energy.
6. The device of claim 1, wherein the device further comprises a compliant skin  
contacting material.
- 30 7. The device of claim 1, wherein the applicator further comprises a receptacle for  
drug dispensal.
8. The device of claim 1, wherein the applicator further comprises a skin patch  
carrying a pre-defined dosage of the agent.  
35
9. The device of claim 1, wherein the applicator further comprises a condom  
carrying a pre-defined dosage of the agent.

10. The device of claim 1, wherein the applicator further comprises a cap adapted for placement on a subject's head carrying a pre-defined dosage of the agent.
- 5 11. The device of claim 1, wherein the applicator further comprises a cartridge containing a pre-defined dosage of the agent.
12. The device of claim 1, wherein the applicator further comprises a dispenser cartridge with a connector for coupling the dispenser to the transducer.
- 10 13. The device of claim 1, wherein the applicator further comprises a reservoir of the agent and a flow regulator for applying a pre-defined dosage of the agent.
14. The device of claim 1, wherein the device further comprises a pressure
- 15 transducer for monitoring changes in the tissue during therapy.
15. The device of claim 1, wherein the device further comprises a ring-like structure adapted to surround the tissue surface.
- 20 16. The device of claim 1, wherein the device further comprises a plurality of ultrasound transducers.
17. The device of claim 16, wherein the plurality of ultrasound transducers are arranged to provide constructive wave interference.
- 25 18. The device of claim 16, wherein the plurality of ultrasound transducers are arranged in a toroidal configuration.
19. The device of claim 1, wherein the device further comprises a detector for
- 30 monitoring feedback signals from the transducer.
20. The device of claim 1, wherein the device further comprises a battery for power supply.

- 20 -

21. A method for treating erectile dysfunction, the method comprising:  
contacting a tissue surface of a male subject in need of such treatment with an  
effective amount of an agent capable of treating erectile  
dysfunction; and  
5 applying ultrasound energy to the tissue surface, such that the erectile  
dysfunction is treated.
22. The method of claim 21, wherein the tissue surface is a skin surface of the penis.
- 10 23. The method of claim 21, wherein the step of contacting comprises applying the  
active agent to the tissue surface with a skin patch carrying the active agent.
24. The method of claim 21, wherein the step of contacting comprises applying the  
active agent to the tissue surface from a reservoir of the active agent stored within a hand  
15 held applicator.
25. The method of claim 21, wherein the step of contacting comprises applying the  
active agent to the tissue surface from a dispenser coupled to an ultrasound transducer,  
and the step of applying ultrasound energy further comprises activating the transducer.  
20
26. The method of claim 21, wherein the step of contacting comprises applying the  
active agent to the tissue surface with a condom coated with the active agent.
27. The method of claim 21, wherein the agent capable of treating erectile  
25 dysfunction is selected from the group consisting of phosphodiesterase inhibitors,  
vasoactive agents, papaverine, minoxidil, prostaglandins, organic nitrites, inhibitors of  
the renin-angiotensin system, and inducible Nitric Oxide Synthase (iNOS) agents.
28. The method of claim 27, wherein the phosphodiesterase inhibitor is sildenafil.  
30
29. The method of claim 27, wherein the phosphodiesterase inhibitor is alprostadil.
30. The method of claim 21, wherein the step of applying ultrasound energy  
comprises applying ultrasound energy at a frequency ranging from about 20 kHz to  
35 about 5 MHz and at a power of about 0.02 to about 3 watts/cm<sup>2</sup>.

31. A method for treating muscle inflammation, the method comprising:  
contacting a tissue surface overlying an inflamed muscle region with an effective  
amount of an agent capable of treating muscle inflammation; and  
applying ultrasound energy to the tissue surface, such that the agent is transported  
5 transdermally to the muscle tissue and the inflammation is treated.
32. The method of claim 31, wherein the step of contacting comprises applying the  
active agent to the tissue surface with a skin patch carrying the active agent.
- 10 33. The method of claim 31, wherein the step of contacting comprises applying the  
active agent to the tissue surface from a reservoir of the active agent stored within a hand  
held applicator.
34. The method of claim 31, wherein the step of contacting comprises applying the  
15 active agent to the tissue surface from a dispenser coupled to an ultrasound transducer,  
and the step of applying ultrasound energy further comprises activating the transducer.
35. The method of claim 31, wherein the agent capable of treating muscle  
inflammation is selected from the group consisting of analgesics, anti-inflammatory  
20 agents, and steroids.
36. The method of claim 31, wherein the agent is a cortisone derivative.
37. The method of claim 31, wherein the step of applying ultrasound energy further  
25 comprises applying ultrasound energy at a frequency ranging from about 20 kHz to  
about 5 MHz.
38. The method of claim 31, wherein the step of applying ultrasound energy further  
comprises applying ultrasound energy at a power of about 0.02 to about 2 watts/cm<sup>2</sup>.  
30
39. The method of claim 31, wherein the step of applying ultrasound energy further  
comprises applying ultrasound energy with a plurality of ultrasound transducers  
arranged to provide constructive wave interference.
- 35 40. The method of claim 31, wherein the step of applying ultrasound energy further  
comprises applying ultrasound energy and varying the frequency of ultrasonic  
oscillations during the application.

41. A method for treating hair loss comprising:  
contacting a tissue surface of a subject in need of such treatment with an effective  
amount of an agent capable of inhibiting hair loss; and  
5 applying ultrasound energy to the tissue surface, such that the agent is transported  
transdermally to a subdermal region proximal to a dormant hair follicle papilla stimulate  
activity of the dormant papilla.
42. The method of claim 41, wherein the tissue surface is the scalp.
- 10 43. The method of claim 41, wherein the step of contacting comprises applying the  
active agent to the tissue surface with a cap coated with the active agent.
44. The method of claim 41, wherein the step of contacting comprises applying the  
15 active agent to the tissue surface from a reservoir of the active agent stored within a hand  
held applicator.
45. The method of claim 41, wherein the step of contacting comprises applying the  
active agent to the tissue surface from a dispenser coupled to an ultrasound transducer,  
20 and the step of applying ultrasound energy further comprises activating the transducer.
46. The method of claim 41, wherein the agent capable of treating muscle  
inflammation is selected from the group consisting of minoxidil, finasteride, fabao-101,  
cyproterone acetate, ethinyl estradiol, aldactone and spironolactone.
- 25 47. The method of claim 41, wherein the agent is minoxidil derivative.
48. The method of claim 41, wherein the step of applying ultrasound energy further  
comprises applying ultrasound energy at a frequency ranging from about 20 kHz to  
30 about 5 MHz and at a power of about 0.02 to about 2 watts/cm<sup>2</sup>.
49. The method of claim 41, wherein the step of applying ultrasound energy further  
comprises applying ultrasound energy with a plurality of ultrasound transducers  
arranged to provide constructive wave interference.
- 35



50. The method of claim 41, wherein the step of applying ultrasound energy further comprises applying ultrasound energy and varying the frequency of ultrasonic oscillations during the application.

1/7

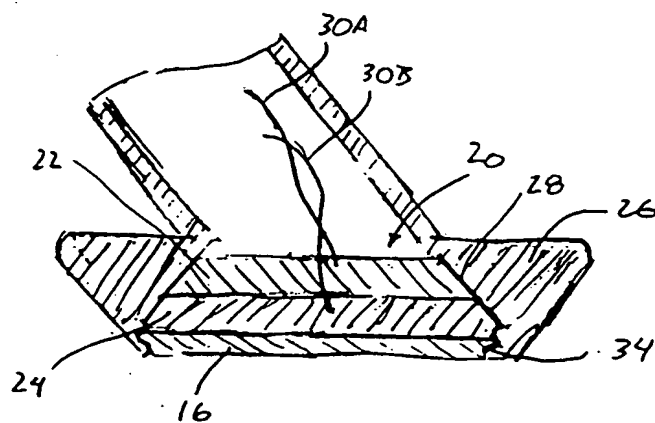
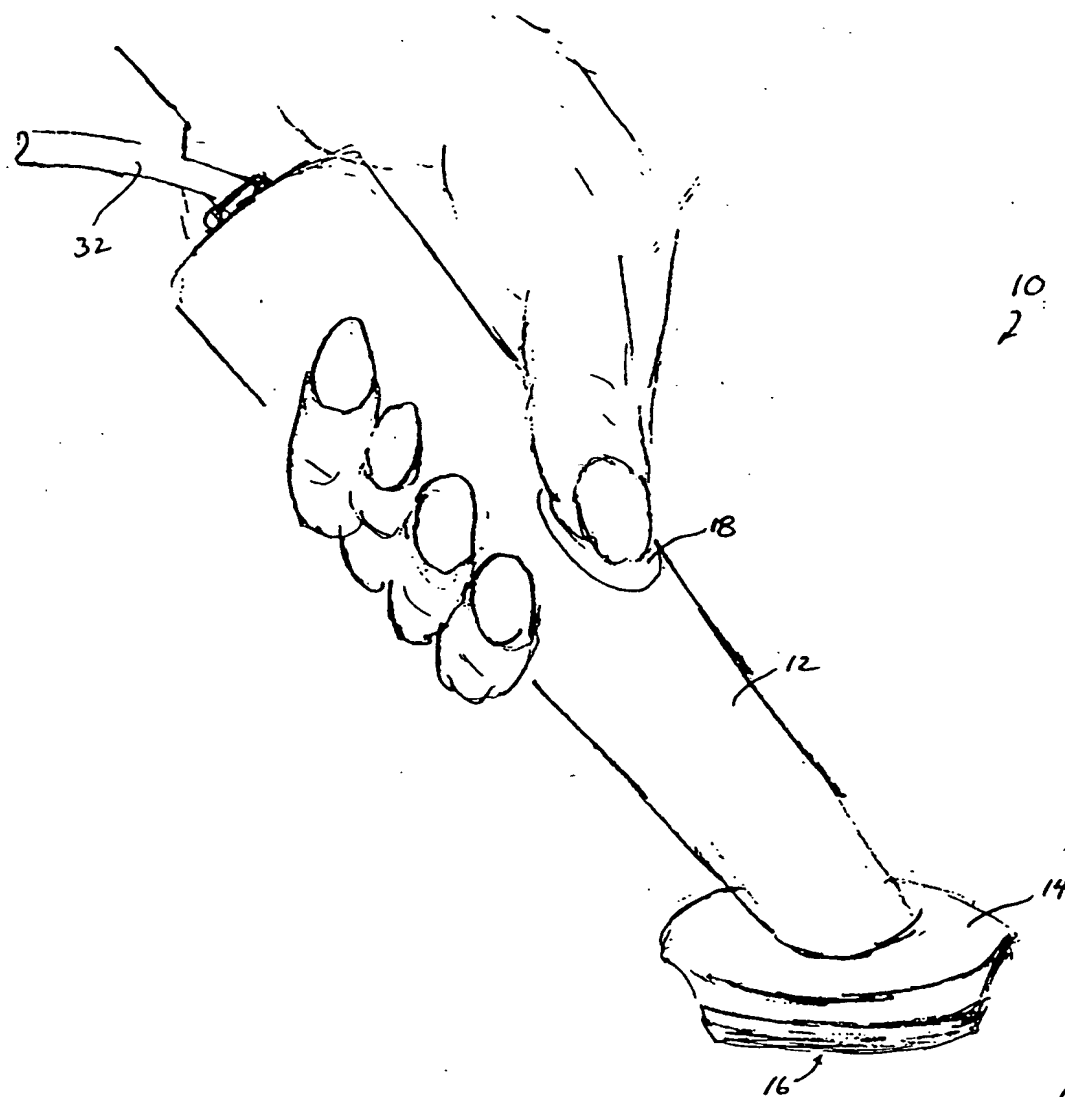


FIG 2

2/7



FIG. 3

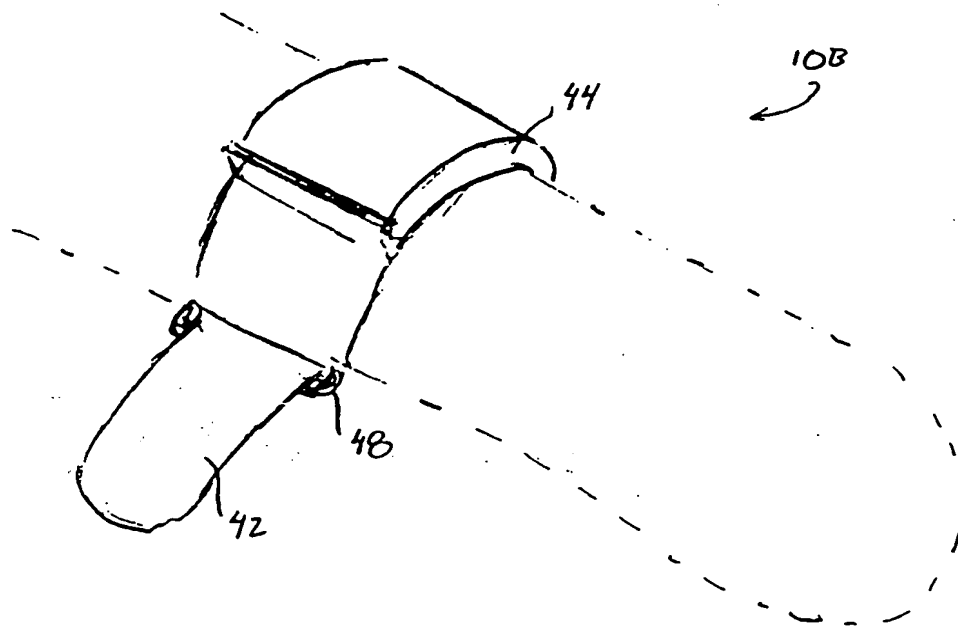
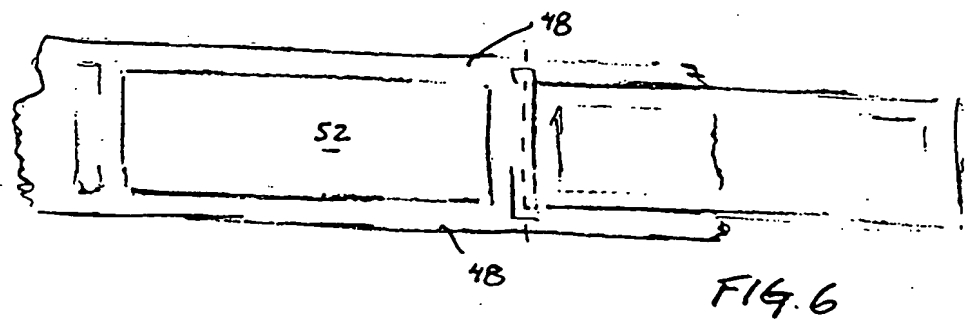
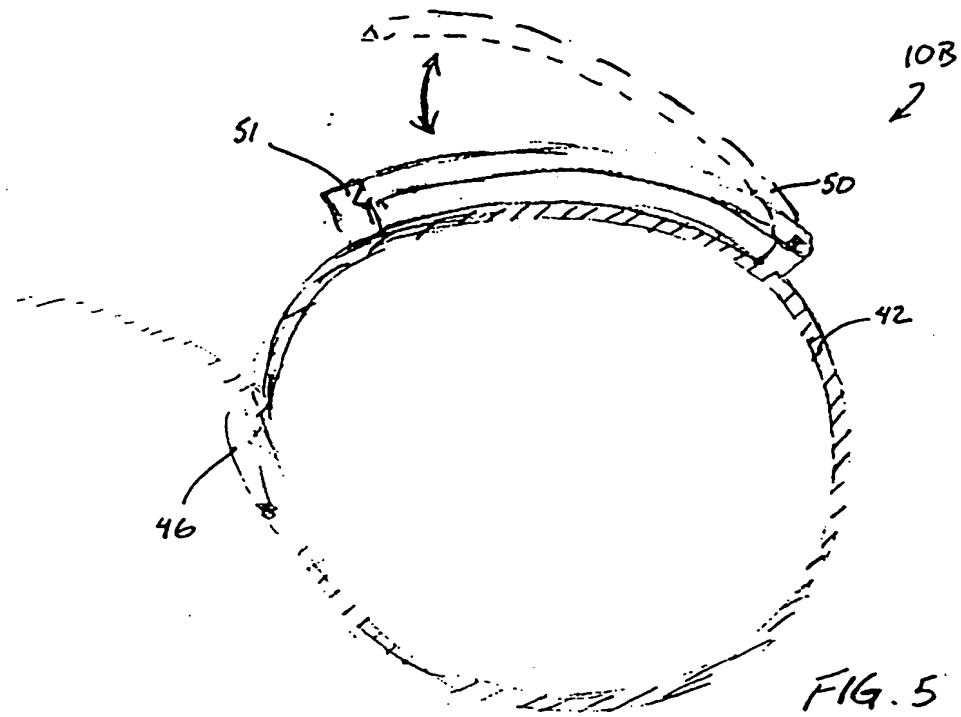


FIG. 4



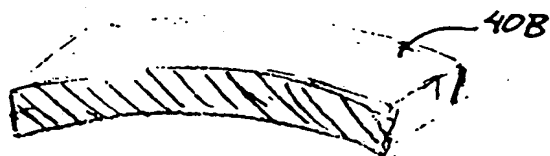


FIG. 7

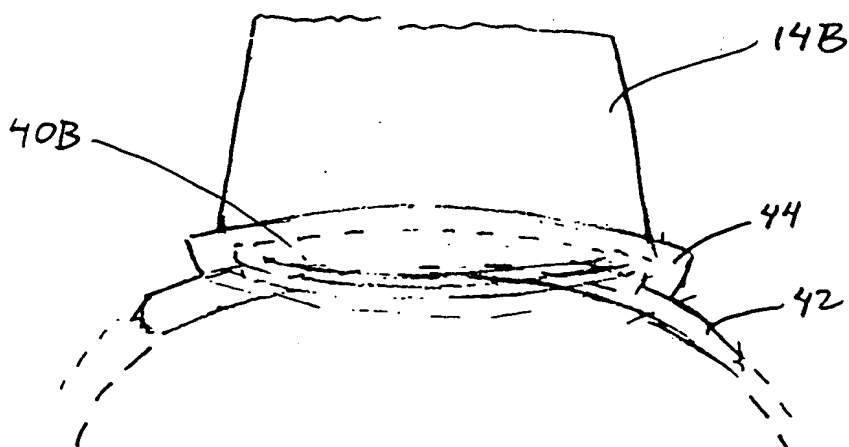


FIG. 8

5/7

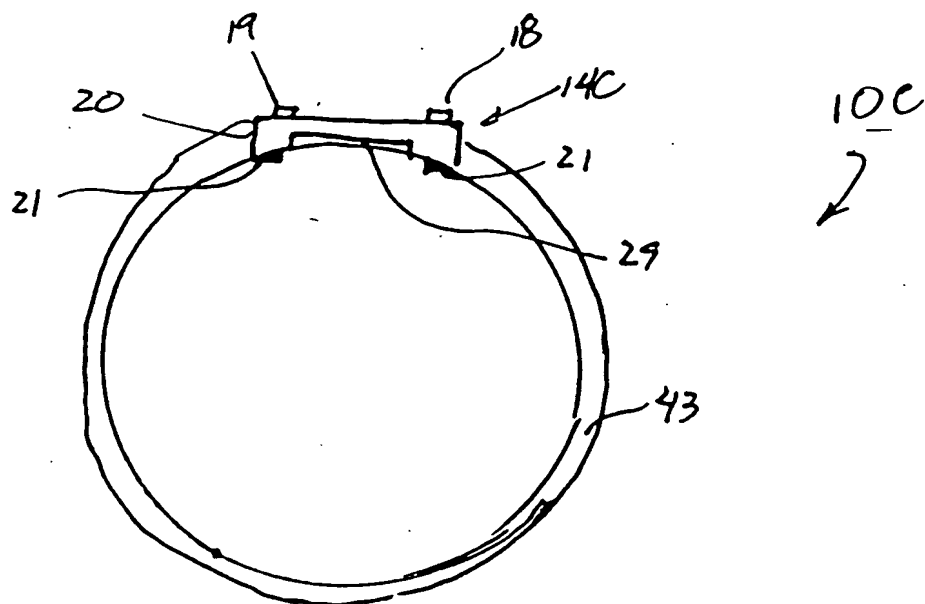


FIG. 9



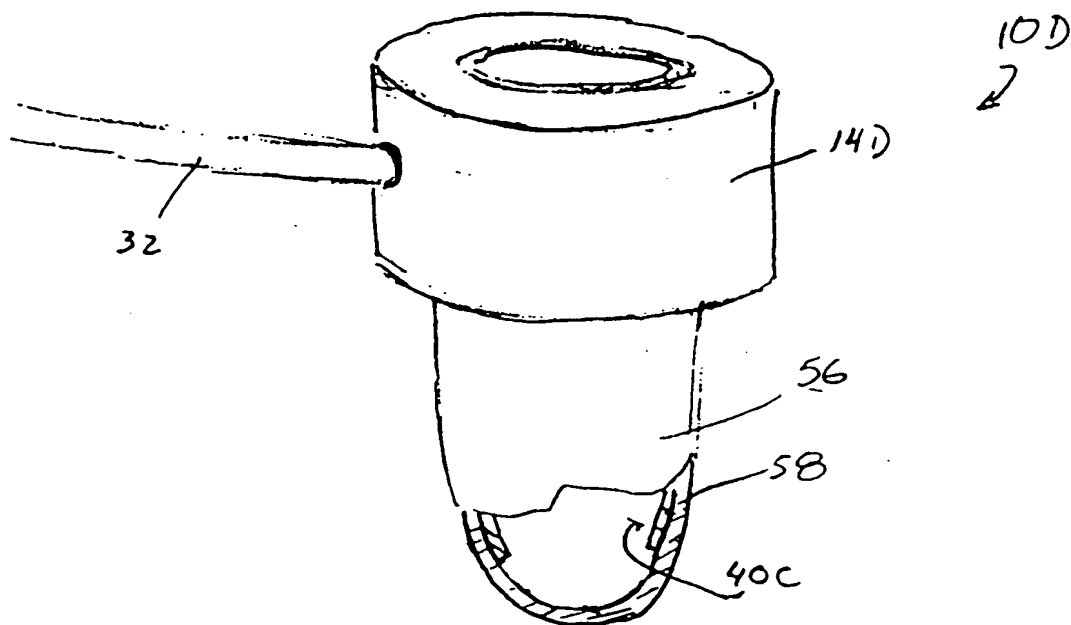


FIG. 10



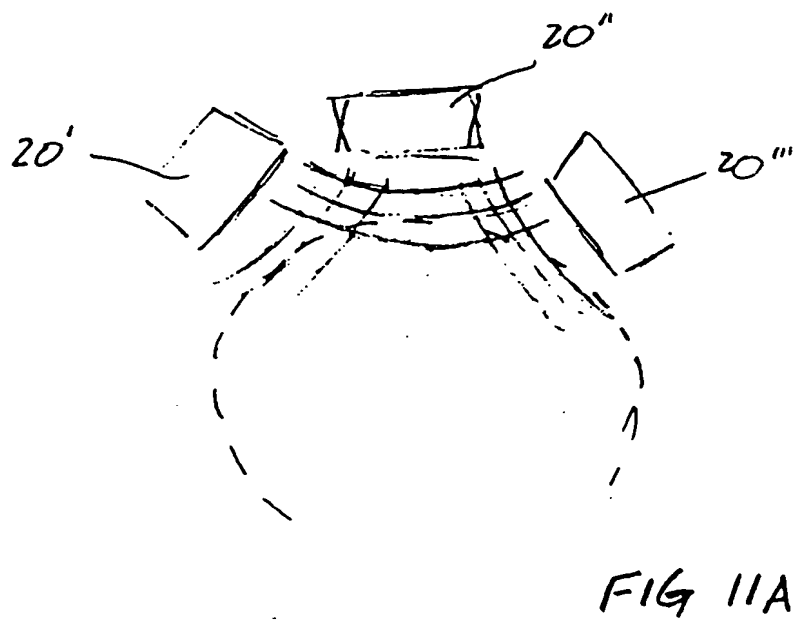

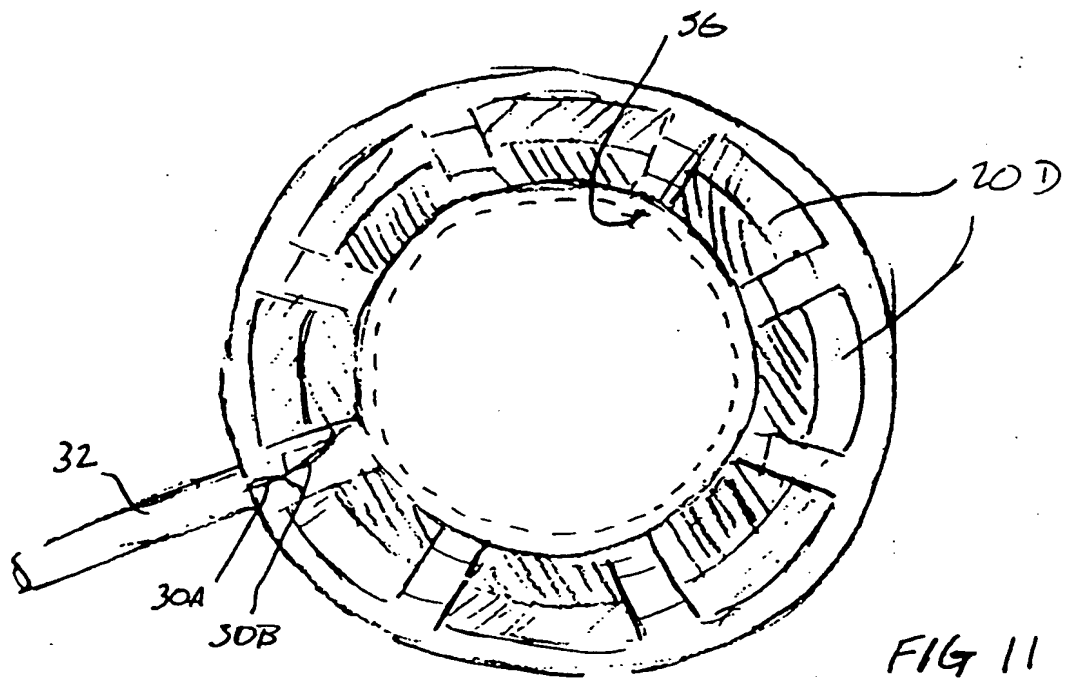

## INTERNATIONAL SEARCH REPORT

International Application No. PCT/US 99/02701

A. CLASSIFICATION OF SUBJECT MATTER		
A 61 M 37/00		
According to International Patent Classification (IPC) or to both national classification and IPC <sup>6</sup>		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
A 61 M		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5421816 A (LIPKOVER, L.M.) 06 June 1995, abstract, column 4, line 46 - column 5, line 26, column 5, lines 49-51, column 9, line 61 - column 10, line 68, column 11, line 55 - column 12, line 7, column 12, line 38 - column 13, line 4, column 18, lines 37-52, fig. 5-11,28.	1-8, 11,16, 17
A		13,14, 21,31, 41
X	US 5618275 A (BOCK, R.) 08 April 1997, the whole document,	1-4,6, 7
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
21 June 1999		22 07 1999
Name and mailing address of the ISA European Patent Office, P.O. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl, Fax (+ 31-70) 340-3016		Authorized officer  LUDWIG e.h.

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 99/02701

-2-

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>especially column 1, lines 35-39, column 4, lines 1-58, column 5, lines 23-38, fig. 2A, 2B (cited in the application).</p> <p>--</p>	21, 31, 41
X	<p>US 5267985 A (SHIMADA, J. et al.) 07 December 1993, the whole document, especially column 5, lines 39-45, column 6, line 6 - column 7, line 17 (cited in the application).</p> <p>--</p>	1, 2, 4, 6, 7, 16, 17, 20
A		21, 31, 41
X	<p>US 5445611 A (EPPSTEIN, J. et al.) 29 August 1995, abstract, column 7, lines 10-56, claims 1-9, 11-17, 19.</p> <p>--</p>	1-5, 16, 17
A		21, 31, 35, 36-38, 40, 41
X	<p>EP 0278074 A2 (TACHIBANA, S. et al.) 17 August 1988, the whole document, especially page 3, line 35 - page 4, line 42, page 8, line 3 - page 9, line 8, claims 1-8, fig. 1-4b.</p> <p>--</p>	1, 2, 4-8, 20
Y A		3 21, 31, 41
X	<p>US 5171215A A (FLANAGAN, D.F.) 15 December 1992, the whole document.</p> <p>--</p>	1, 2, 7, 12
Y A		3 13, 14, 21, 31, 41
Y	<p>EP 0736305 A2 (CYGNUS, INC. et al.) 09 October 1996,</p> <p>--</p>	3

# INTERNATIONAL SEARCH REPORT

International Application No

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

PCT/US 99/02701

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>column 8, lines 13-16. --</p> <p>US 4767402 A (KOST, J. et al.) 30 August 1988, column 3, lines 9-37, column 4, lines 25-40, column 4, line 58 - column 5, line 11.</p>	1-6, 8
A	<p>--</p>	21, 31, 41
A	<p>EP 0634189 A2 (TACHIBANA, K. et al.) 18 January 1995, abstract. ----</p>	1-4

## ANHANG

zum internationalen Recherchen-  
bericht über die internationale  
Patentanmeldung Nr.

## ANNEX

to the International Search  
Report to the International Patent  
Application No.

## ANNEXE

au rapport de recherche inter-  
national relatif à la demande de brevet  
international n°

PCT/US 99/02701 SAE 228611

In diesem Anhang sind die Mitglieder  
der Patentfamilien der in obenge-  
nannten internationalen Recherchenbericht  
angeführten Patentdokumente angegeben.  
Diese Angaben dienen nur zur Unter-  
stützung und erfolgen ohne Gewähr.

This Annex lists the patent family  
members relating to the patent documents  
cited in the above-mentioned inter-  
national search report. The Office is  
in no way liable for these particulars  
which are given merely for the purpose  
of information.

La présente annexe indique les  
membres de la famille de brevets  
relatifs aux documents de brevets cités  
dans le rapport de recherche inter-  
national visé ci-dessus. Les renseigne-  
ments fournis sont donnés à titre indica-  
tif et n'engagent pas la responsabilité  
de l'Office.

In Recherchenbericht angeführtes Patentdokument Patent document cited in search report Document de brevet cité dans le rapport de recherche		Datum der Veröffentlichung Publication date Date de publication	Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets	Datum der Veröffentlichung Publication date Date de publication
US A	5421816	06-06-1995	AU A1 53591/94 AU B2 678781 CA AA 2146010 EP A1 684856 JP T2 8502424 WO A2 9408655 WO A3 9408655 US A 5617851	09-05-1994 12-06-1997 28-04-1994 06-12-1995 19-03-1996 28-04-1994 01-09-1994 08-04-1997
US A	5618275	08-04-1997	AU A1 75969/96 WO A1 9715232	15-05-1997 01-05-1997
US A	5267985	07-12-1993	keine - none - rien	
US A	5445611	29-08-1995	US A 5885211 WO A1 9707734 AU A1 68631/96 EP A1 858285 GB A0 9702766 GB A1 2307414 GB B2 2307414 IL A0 123379 NO A0 980878 NO A 980878 US A 5458140 US A 5722397 CA AA 2199002 CA C 2199002 CN A 1195276	23-03-1999 06-03-1997 19-03-1997 19-08-1998 02-04-1997 28-05-1997 11-03-1998 24-09-1998 27-02-1998 27-04-1998 17-10-1995 03-03-1998 01-03-1997 23-02-1999 07-10-1998
EP A2	278074	17-08-1988	AT E 88100 AT E 119021 DE CO 3785442 DE T2 3785442 DE CO 3751121 DE T2 3751121 EP A3 278074 EP A1 495531 EP B1 278074 EP B1 495531 EP T3 2039409 GR T3 3008251 JP A2 63135179 JP B4 3063913 KR B1 9004318 US A 4821740 US A 4953565 US A 5007438	15-04-1993 15-03-1995 19-05-1993 16-09-1993 06-04-1995 22-06-1995 26-07-1989 22-07-1992 14-04-1993 01-03-1995 01-10-1993 30-09-1993 07-06-1988 03-10-1991 22-06-1990 18-04-1989 04-09-1990 16-04-1991
US A	5171215	15-12-1992	keine - none - rien	
EP A2	736305	09-10-1996	AT E 148001 AU A1 74883/91 AU B2 656519 CA AA 2075624 CA C 2075624 DE CO 69124365 DE T2 69124365 EP A1 515566 EP A4 515566 EP B1 515566 EP A3 736305 EP T3 2097206 FI A 923743 FI A0 923743 JP T2 6501865 JP B2 2695986 NO A 923254 NO A0 923254 NZ A 237197 PT A 96856 US A 5115805 WO A1 9112772 US A 5231975 US A 5231975 US A 5636632	15-02-1997 18-09-1991 09-02-1995 24-08-1991 18-11-1997 06-03-1997 28-05-1997 02-12-1992 03-02-1993 22-01-1997 19-08-1998 01-04-1997 20-08-1992 20-08-1992 03-03-1994 14-01-1998 19-08-1992 19-08-1992 24-04-1997 29-11-1991 26-05-1992 05-09-1991 03-08-1993 28-06-1994 10-06-1997
JS A	4767402	30-08-1988	CA A1 1324051 EP A1 275284	09-11-1993 27-07-1988

JP	T2	1500247	72-02-1989
JP	B2	2710281	10-02-1998
WO	A2	8800001	14-01-1988
US	A	4948587	14-08-1990
US	A	4657543	14-04-1987
US	A	4779806	25-10-1988
CA	A1	1291064	22-10-1991
EP	A1	245535	19-11-1987
DE	C0	3685958	13-08-1992
DE	T2	3685958	14-01-1993
EP	TD	245535	30-03-1989
EP	B1	245535	08-07-1992

A2	634189	18-01-1995	EP	A3	634189	17-01-1996
			JP	A2	7024074	27-01-1995
			US	A	5720710	24-02-1998





## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>A61M 37/00</b>	<b>A1</b>	(11) International Publication Number: <b>WO 99/39763</b> (43) International Publication Date: 12 August 1999 (12.08.99)
<p>(21) International Application Number: PCT/US99/02701</p> <p>(22) International Filing Date: 9 February 1999 (09.02.99)</p> <p>(30) Priority Data: 60/074,231 10 February 1998 (10.02.98) US 09/114,810 13 July 1998 (13.07.98) US</p> <p>(71) Applicant: CHILDREN'S MEDICAL CENTER CORPORATION [US/US]; 300 Longwood Avenue, Boston, MA 02115 (US).</p> <p>(72) Inventors: ATALA, Anthony; 74 Westerly Road, Weston, MA 02193 (US). MACHLOUF, Marcelle; 34a Harvard Avenue #2, Brookline, MA 02146 (US).</p> <p>(74) Agents: HANLEY, Elizabeth, A. et al.; Lahive &amp; Cockfield, LLP, 28 State Street, Boston, MA 02109 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>
<p>(54) Title: <b>ULTRASOUND-MEDIATED DRUG DELIVERY</b></p> <p>(57) Abstract</p> <p>Methods and apparatus are disclosed for treating physiological problems, and for providing rapid, efficacious transdermal treatment, for example, of muscle sprains, erectile dysfunction, or baldness, without requiring the use of needles or other invasive interventions. A topical therapeutic agent and ultrasound energy are applied to a tissue surface, e.g., the skin, such that the ultrasound enhances transdermal penetration of the agent. The invention is especially useful in localized delivery of a controlled dosage of a therapeutic agent to the small blood vessels and capillaries beneath the skin's surface.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LJ	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		



## ULTRASOUND-MEDIATED DRUG DELIVERY

### Background of the Invention

The technical field of this invention is medical treatments and devices. In particular, medical methods and devices are disclosed for enhancing transcutaneous absorption of drugs. The invention is useful for a variety of purposes, including the treatment of muscle sprains and inflammation, treatment of male erectile dysfunction, treatment of hereditary baldness and other applications.

Muscle sprains typically occur when over-exercise or a traumatic event causes a joint to move beyond its normal range of motion and tissues of the muscle's tendons or ligaments are torn or stretched. The results of such sprains are typically rapid swelling, tenderness or pain, and/or impaired joint function. The treatment of muscle sprains usually involves applying ice to the affected region, rest and aspirin or other analgesic agents. Only in serious cases are stronger anti-inflammatory drugs recommended because they must be applied systemically (e.g., orally) or by injection. The use of topical analgesics and/or topical anti-inflammatory agents is considered of marginal effectiveness, despite the plethora of products sold as over-the-counter pain relief agents. Topical agents are largely unable to pass transdermally to the capillary beds that surround the afflicted tissue and, hence, usually can not deliver a sufficient dosage of the medication to the site of injury.

Erectile dysfunction is a common medical problem among men. The incidence increases with age and other medical disorders such as diabetes mellitus. The dysfunction is characterized by an inability to obtain a penile erection or to sustain an erection. Several vasoactive drugs have been tried for the clinical evaluation and treatment of impotence. Among them, papaverine and prostaglandin E1 (PGE 1) are the most widely used. These agents are strong smooth muscle relaxants, which can induce penile erection after intracorporal injection (intracavernosal therapy). However, intracavernosal injections have several side effects. Repeated injections can cause fibrosis of the penile shaft and priapism (prolonged erection). Moreover, this therapy has associated disadvantages such as discomfort, pain, and injection anxiety, which can result in patient rejection of the therapy and/or a less than optimal level of satisfaction even when erection is achieved.

Recently, a new class of drugs have been greeted with considerable enthusiasm. These drugs, known as phosphodiesterase type 5 inhibitors, block an phosphodiesterase enzyme that functions to break down the chemical GMP, produced during sexual stimulation. By ensuring that GMP remains in the penile tissue and surrounding blood vessels, these inhibitors help initiate and maintain an erection. The first of this new class

of drugs, sildenafil (sold by Pfizer under the trademark Viagra™) has already become widely prescribed. Unfortunately, the drug must be taken systemically and many subjects have reported side effects such as headaches, nausea and facial flushing and indigestion.

5       The transdermal application of vasoactive drugs for treatment of erectile dysfunction has been studied *in vitro* and *in vivo*. While transdermal application avoids certain of the disadvantages of injection, transdermal therapies to date have been associated with limited success. The side effects of sildenafil and other enzyme inhibitors, as well as, systemic vasoactive drugs could be diminished significantly, if a  
10       suitable transdermal delivery mechanism was available because the necessary doses could be lower and the drugs would be less likely to affect remote body organs.

Hereditary baldness usually occurs in men and is characterized by a gradual thinning of the hair, generally, and a receding hairline. Over time the recession continues until the individual is left with a horseshoe like pattern of hair around the sides  
15       of the head. Recently, the drug minoxidil (originally developed to treat high blood pressure) has been found to inhibit hairline recession and, in some cases, stimulate new hair growth. The drug is now sold as a over-the-counter product, usually in the form of a topical lotion. Although the mechanism of action is not fully understood, it appears that the drug stimulates the activity of dormant hair papilla, causing the hair roots to grow a  
20       new shafts through their follicles. Again, the effectiveness of this therapy is limited by the ability to topically deliver sufficient amounts of the drug to the papilla and surrounding beds of blood vessels.

There exists a need to better transdermal drug delivery systems, for the treatment of physiological problems generally, and for the treatment of muscle sprains, erectile  
25       dysfunctions, and baldness, in particular. Systems and methods that can improve the effectiveness of existing agents and/or permit systemic agents to be delivered locally would satisfy a long-felt need in the art.

### **Summary of the Invention**

30       Methods and apparatus are disclosed for treating physiological problems, and for providing rapid, efficacious transdermal treatment of treatment of muscle sprains, erectile dysfunctions, and baldness, in particular, without requiring the use of needles or other invasive interventions. The present invention applies both a topical therapeutic agent and ultrasound energy to a tissue surface, such as the skin, such the ultrasound  
35       enhances transdermal penetration of the agent. The invention is especially useful in localized delivery of a controlled dosage of a therapeutic agent to the small blood vessels and capillaries beneath the skin's surface.

In one aspect, the invention provides a method for treatment of muscle sprains and other superficial tissue inflammations. The method includes the steps of contacting the skin surface of a subject in need of such treatment with an effective amount of an agent capable of treating the inflammation, and applying ultrasound energy to the skin surface, such that ultrasound-mediated drug absorption occurs and the inflammation is treated. Agents useful in treatment of muscle sprains include analgesics, anti-inflammatory agents, cortisone derivatives and other steroids.

In another aspect, the invention provides a method for treatment of erectile dysfunction. The method includes the steps of contacting the skin surface of a subject in need of such treatment with an effective amount of an agent capable of treating erectile dysfunction, and applying ultrasound energy to the skin surface, such that ultrasound-mediated drug absorption occurs and the erectile dysfunction is treated. Agents capable of treating erectile dysfunction include recently developed enzyme inhibitors, such as sildenafil or alprostadil, as well as more traditional vasoactive agents, such as papaverine, minoxidil, prostaglandins, organic nitrites, inhibitors of the renin-angiotensin system, and inducible Nitric Oxide Synthase (iNOS) agents.

In yet another aspect, the invention provides a method for treatment or prevention of hair loss. The method includes the steps of contacting the skin surface of a subject in need of such treatment with an effective amount of an agent capable of inducing hair growth, and applying ultrasound energy to the skin surface, such that ultrasound-mediated drug absorption occurs and the hair papilla are stimulated. Agents useful in controlling hair loss include minoxidil, finasteride, fabao-101, cyproterone acetate, ethinyl estradiol, aldactone and spironolactone. More generally, the invention is useful for treatment of hair loss with anti-androgen therapies (e.g., localized delivery of therapeutic agents designed to block the enzymatic conversion of testosterone into dihydrotestosterone(DHT)) and/or vasodialator therapies design to increase blood flow to the follicle roots.

Transdermal administration of drugs, such as cortisone derivatives, sildenafil, papaverine and minoxidil (among others) can offer a safe, non-painful alternative to previously known therapies. However, conventional transdermal application of such drugs has met with reduced success, possibly due to the stratum corneum layer of the skin, which is resistant to drug penetration through the skin to the underlying tissues such as torn ligaments, tendons, muscle tissue, the corpus cavernosum of a penis, and/or the papillae and surrounding structures of hair follicles.

In one aspect of the apparatus, the invention provides a device for the treatment of muscle sprains and the like. The device include means for applying an effective amount of an agent capable of capable of treating the muscle aliment to a tissue surface

of a subject, and ultrasound means, operatively coupled to the means for applying the drug, for promoting transdermal absorption of the drug through the tissue of the subject. In one embodiment, the device has the form of a hand held instrument. The means for applying a drug can be a reservoir which contains the drug, and, optionally, a  
5 physiologically-acceptable carrier or excipient. The reservoir can be of the type employed in conventional transdermal patch applications or it can be one specially designed to be integrated with the hand-held ultrasound applicator. The applicator can also include a slot, reservoir, or space for receiving a (preferably replaceable) source of the therapeutic agent, and a compliant skin contacting surface.

- 10 In another aspect of the apparatus, the invention provides a device for the treatment of erectile dysfunction. The device includes means for applying an effective amount of an agent capable of treating erectile dysfunction to a tissue surface of a subject, and ultrasound means, operatively coupled to the means for applying the drug, for promoting transdermal absorption of the drug through the tissue of the subject.
- 15 In a preferred embodiment, the device has the form of a ring or torus adapted for fitting to the penis of the subject. The means for applying a drug can again be a reservoir which contains the drug, and, optionally, a physiologically-acceptable carrier or excipient; the reservoir can be of the type employed in conventional transdermal patch applications. The device can also include a slot, reservoir, or space for receiving a  
20 (preferably replaceable) source of the drug. For example, the device can include a well for receiving a portion of a drug formulation, such as a cream or ointment, or a slot for receiving a disposable reservoir, such as a patch, which can be inserted before the device is used, and then removed and, optionally, discarded after use.

For erectile dysfunction treatment, the device is preferably small in size, such  
25 that it can be unobtrusively placed over the flaccid penis. After penile erection is achieved through use of the device, the device can be removed. However, in one embodiment, the device can be small enough such that it will not interfere with sexual intercourse and need not be removed. In certain embodiments, the ultrasound source is powered by batteries carried within the body of the device. The batteries can be of the  
30 type used for powering microelectronic devices, such as hearing aids, thereby preserving the small size of the device.

The invention also provides systems for applying an effective amount of an agent capable of treating erectile dysfunction to the skin of the penis and means for applying ultrasound energy to the same skin region. The drug dispenser can comprise a  
35 condom having a coating of an active agent on an interior surface; a patch containing the active agent, analogous to conventional transdermal patches for the delivery of drugs such as scopolamine and nicotine; an applicator adapted for placement on or over the

penis of the subject, having a surface impregnated with an active agent, or a reservoir containing the active agent. The applicator can further include means for dispensing the agent, preferably at a controlled rate, to the subject's skin; and other like means for delivering the drug to the subject.

5           In one illustrated embodiment, the means for applying the active agent includes a penile device which is placed around the penis to deliver the drug and the required ultrasound energy for appropriate drug delivery is applied with a hand held applicator. For example, a drug permeated transdermal patch can be placed in direct contact with the penile skin, and an ultrasound-producing device is placed over the patch. After a  
10           suitable time period, e.g., a few minutes, the ultrasound applicator and the patch are removed, exposing the erect phallus.

          The devices and systems of the invention can also be provided with means for determining the erectile state of the penis, e.g., for detecting detumescence or loss of erection. Such means include a pressure-sensitive mechanical switch such as described  
15           previously, or an imaging ultrasound receiver for determining blood flow or penile erection. In the event of detumescence, ultrasound energy can be applied to promote renewed penile erection.

          According to the methods of invention, an agent capable of treating erectile dysfunction, e.g., an agent capable of promoting penile erection, such as a smooth  
20           muscle relaxant, is applied to a tissue surface, e.g., the skin of the patient, preferably on the penis itself, e.g., the glans or, more preferably, the shaft of the penis (or both the glans and the shaft, e.g., as when a condom containing the active agent is used). It will be appreciated, however, that the agent can be applied in other ways, e.g., intra-urethrally. In certain embodiments, the active agent can be applied to other skin  
25           surfaces, e.g., any skin surface, which will permit an effective amount of the drug to penetrate the skin and reach the penile tissues such that penile erection is promoted. An active agent can also be applied to any skin surfaces in addition to than the penis, if desired (e.g., to provide greater skin surface area for drug penetration). The agent can be any compound which can be applied to a tissue surface of the subject and which can  
30           promote penile erection. The drug agent can be applied to the skin by topical administration, e.g., by applying a cream, lotion, gel or other formulation which includes an active agent, to the skin before or during the application of ultrasound to the affected area. In certain embodiments, the drug can be applied by contracting the skin with a device which includes a coating or layer of the drug disposed thereon such that the drug  
35           is applied to the skin. A band, sheath, condom, patch, or other carrier having a skin-contacting surface can be coated with an active agent, such that the drug is applied to the skin of the user.

For example, in one embodiment, the subject administers the drug by rolling a condom onto the flaccid penis; the condom is coated on at least a portion of the interior surface thereof with an active agent (which can be formulated in a base including conventional lubricants, emollients, or other ingredients known in the art). The condom is worn for a period of time sufficient to ensure adequate application of the active agent to the skin of the subject. The condom can then be removed and ultrasound energy applied to the penis of the user; alternatively, in certain embodiments, the ultrasound energy can be provided to the penis while the condom is still worn, e.g., by application through the condom to the penis. In either case, application of ultrasound energy promotes penile erection by increasing the bioavailability of the active agent to the underlying tissues of the penis, such as the corpus cavernosum. In embodiments in which a condom is employed, the condom can be removed before sexual intercourse or alternatively can be worn during intercourse.

Therapeutic agents useful for treatment of erectile dysfunction include, without limitation, sildenafil, alprostadil, papaverine, minoxidil, prostaglandins, such as prostaglandin E2 (see, e.g., U.S. Patent 5,708,031 for formulations of prostaglandins useful for topical application to the penis), organic nitrites (see, e.g., U.S. Patent 5,646,181 for useful organic nitrites and formulations thereof), inhibitors of the renin-angiotensin system (see, e.g., U.S. Patent 5,658,936), and/or inducible Nitric Oxide Synthase (iNOS) agents (see, e.g., U.S. Patent 5,594,032) or combinations of such compounds as well as other compounds known to those of ordinary skill in the art. (The teachings of each of the cited patents are incorporated herein by reference.) Mixtures of active agents can also be employed.

In yet another aspect of the apparatus, the invention provides a device for the treatment of hair loss. The device can include mean for applying an effective amount of an agent capable of treating the hair loss to the scalp, or other affected region. of a subject, and ultrasound means, operatively coupled to the means for applying the drug, for promoting transdermal absorption of the drug through the tissue of the subject. In one embodiment, the device has the form of a hand held instrument. The means for applying a drug can be a reservoir which contains the drug, and, optionally, a physiologically-acceptable carrier or excipient. The reservoir can be of the type employed in conventional transdermal patch applications or it can one specially designed to be integrated with the hand-held ultrasound applicator. The reservoir can take the form of a scalp cap which is fitted over the affected area. The applicator can also include a slot, reservoir, or space for receiving a (preferably replaceable) source of the therapeutic agent. Alternatively the agent can be applied manually (e.g., massaged into the scalp).

The therapeutic agent for treatment of hair loss can be, without limitation, compounds such as minoxidil, finasteride, fabao-101, cyproterone acetate, ethinyl estradiol, aldactone and spironolactone. More generally, the agent can be an anti-androgen therapeutic agent (designed to block the enzymatic conversion of testosterone into dihydrotestosterone(DHT)) and/or a vasodilator designed to increase blood flow to the penile blood vessels.

The methods and systems of the invention can also include additional means for enhancing transdermal penetration or absorption of an active agent. For example, enhancers of transdermal drug absorption have been used to increase the efficacy of other transdermal drug administration modalities, such as transdermal skin patches and the like. Permeation enhancers which can be useful in the present invention include dimethylsulfoxide related compounds (DMSOs), 1,3-dioxacycloalkanes (SEPA's), amphoteric cations and anions, fatty acids (and their esters), fatty alcohols (and their ethers), glycols, alcohols, acetones, ketones and other organic solvents, as well as other known permeation enhancers that increase the rate or amount of active agent transported across the dermal barrier.

The ultrasound applicator preferably comprises a power source (such as a battery or transformed household current) and at least one ultrasound transducer capable of providing ultrasound energy at a frequency of between 20 kHz and 5 MHz and a power of about 0.02 to about 3 watts/cm<sup>2</sup>. (Ultrasound sources are described in more detail *infra*). The ultrasound applicator can further include suitable control circuitry for generating complex waveforms, amplitude variations, frequency variations, constructive interference and other functional controls on the ultrasonic therapy.

The devices and systems are also preferably provided with means for switching the ultrasound source on and off at appropriate intervals, e.g., for switching on the ultrasound source to promote penile erection, after which the ultrasound source is switched off, e.g., to preserve battery life. The means can be a mechanical switch which the user can actuate at the requisite intervals, or, more alternatively, can be a timer or microprocessor-controller switch which is set or programmed before use to provide the appropriate power levels and duration. In a further embodiment, the switch can be mechanically actuated, e.g., in response to tumescence of the penis, to thereby discontinue application of the ultrasound energy when the penis has become erect. In this embodiment, the switch can include a pressure-sensitive switch member proximal to a surface of the device which contacts the penis when penile erection is achieved. Thus, upon erection of the penis, the switch is actuated and the ultrasound source is switched off. In addition to preserving battery life, by switching off the ultrasound source,

excessive stimulation of erection is avoided, thereby avoiding priapism or other conditions which could cause user discomfort.

Thus, the present invention provides a more effective treatment particularly adapted to pathological or physiological conditions where it is desirable to apply a drug  
5 to a local region below but in close proximity to the stratum corneum layer of the skin. The invention allows drugs to diffuse quickly, and to be rapidly taken up by the subsurface localized blood capillary networks, while at the same time does not inactivate the drug molecules, damage healthy epidermis, cause pain or have toxicologic side effects.

10 It has also been discovered that ultrasound frequencies ranging between about 500 kHz and about 3 MHz can promote the therapeutic effect of topically applied agents. Although the mechanical action is not yet clear, and without intending to be bound by any particular theory, ultrasound effects are often classified into two major categories; thermal and non thermal. Cavitation is one of the major non thermal effects, in which  
15 microscopic air pockets are created and oscillated within the tissue upon exposure to the acoustic field. The energy produced by this phenomenon is partially (10-15%) radiated as an acoustic field, whereas most of it is transformed to heat, shock wave or hydrodynamic shear fields, partially disrupting biological tissue.

The occurrence of cavitation depends mainly upon ultrasound frequencies and  
20 intensities. By appropriate control of the cavitation phenomenon, significantly higher doses of therapeutic agents can be transported across the stratum corneum. In addition, induced cavitation can serve a two-fold purpose in the administration of minoxidil and other hair loss treatment agents by not only enhancing skin penetration of the agent but also by opening the hair follicles and driving the therapeutic agent into contact with the  
25 papilla through the lumens of the follicles.

For example, a male human subject can use a device of the invention, including an adjustable band or strap and an ultrasound source with a drug reservoir, as follows. Prior to sexual intercourse, the user places an effective amount of the drug, e.g., in the form of a patch containing a therapeutic agent, into a slot in the housing of the  
30 ultrasound source. The device is then secured to the user's flaccid penis by placing the adjustable band around the shaft of the penis such that the drug patch is in contact with the skin of the penis. The user then presses a button to activate the ultrasound source; the device includes a timer which automatically provides ultrasound energy for two minutes, at a frequency of about 20 kHz and a power of about 0.2 W/cm<sup>2</sup>; and in a duty  
35 cycle of about 20%. the drug is effective to promote an erection after application of the ultrasound energy. The device can then be removed from the penis. If the user should experience loss of erection, the device can be used again to promote another erection. If



necessary, a fresh drug patch can be provided to ensure that an effective amount of drug is used.

Accordingly, novel therapies have been discovered in which ultrasound waves, of different frequencies and/or intensities, are used to enhance transdermal delivery of pharmaceutical agents. Ultrasound-induced cavitation provides a non painful method for enhancing drug delivery with few or no side effects.

Most generally, the invention provides methods for transdermal therapy that include the step of contacting a tissue surface (e.g., the skin surface) of a subject in need of such treatment with an effective amount of an agent capable of treating the physiological condition, and the step of applying ultrasound energy to the tissue surface, such that the condition is treated (e.g., by ultrasound-mediated drug absorption). The term "subject," as used herein, includes mammals, including humans as well as non-human animals such as cats, dogs, horses, pigs, goats, sheep, and non-human primates. In certain embodiments, the step of contacting can include applying the active agent to the tissue surface with a patch or a sheath or condom coated with or otherwise impregnated with the active agent. In other embodiments, the agent can be applied with other devices or systems, e.g., as described herein. The tissue surface is preferably a skin surface, e.g., the skin surrounding a torn muscle, the skin of the penis, or the scalp. Other tissue surfaces, such as the interior of the urethral or vaginal openings, the mouth, and ears can also be contacted with an active agent and treated according to the methods of the invention.

In a further aspect, the invention provides devices, systems and kits for the treatment of physiological problems. The devices include an ultrasound transducer for promoting transdermal absorption of the drug through the skin of the subject. In one embodiment, the device has the form of a hand held sonicator. In another embodiment, the device can take the form of a belt-like structure adapted to fit around a body limb or the penis or the head of the subject. In yet another embodiment the system (or applicator component) can take a sheath-like or scalp-cap shape.

The applicator means for applying a drug can be a reservoir which contains the drug, and, optionally, a physiologically-acceptable carrier or excipient, or a transdermal penetration enhancer. The reservoir can be fluidically coupled via a flow regulator, to the treatment site. Alternatively, the applicator can be constructed like a conventional transdermal patch applications or it can be specifically designed to fit within a hand held housing. In the case of penile therapies the reservoir can be take the form of a condom. In the case of hair loss therapies the reservoir can be take the form of a scalp or skull cap. In other applications, drug can simply be applied to the tissue as a gel or lotion, or

the ultrasound transducer can include an applicator for applying a drug to a skin surface of a subject.

The ultrasound means preferably comprises a power source (such as a replaceable or rechargeable battery, or a transformer for utilization of household current) and at least one ultrasound transducer capable of providing ultrasound energy at a frequency of between about 20kHz and about 3 MHz. In some applications it can be desirable to modulate the frequency using a preprogrammed tuner to alter the frequency over time to enhance microcavitation effects (and other mechanisms of transdermal transport) through the skin. Similarly, the use of two or more transducers (or wave reflectors) can be desirable to induce constructive interference patterns that likewise enhance the skin-penetration rates.

The ultrasound source can be of any suitable design, e.g., a design such as certain ultrasound sources known in art. For example, ultrasound probes used in Doppler sonography are well known, and, by generating appropriate ultrasound frequencies and energies as described herein, can be used in the methods, devices, and systems of the present invention.

The ultrasound source is preferably connected to a power supply and to suitable control means for regulating the ultrasound signal produced by the ultrasound source. The power supply and control means (e.g., circuitry) can be disposed within or external to a body-contacting portion of a device or system of the invention, and is operatively connected to the ultrasound source, e.g., by means of wires running from the ultrasound source, to the power supply and control means. The control means can be provided with a user interface for setting parameters such as the power, duty cycle, and pulse duration of the ultrasound energy provided by the ultrasound source. Suitable control means will be apparent to one of ordinary skill in the art. It will be appreciated that an ultrasound transducer such as a piezoelectric crystal can also be operated as a receiver for ultrasound waves reflected from tissue surrounding the transducer. Thus, the control means can be provided with appropriate receiver circuitry to provide monitoring capability to the systems of the invention. Such monitoring capability can be used by the systems or devices of the invention in a feedback control loop, e.g., for determining when penile erection has been achieved or blood flow to the penis has been enhanced.

#### **Brief Description of the Drawings**

The foregoing and other aspects of the present invention will be appreciated with reference to the detailed description of the invention which follows, which read in conjunction with the accompanying drawings wherein:

- 11 -

FIG. 1 is a schematic, perspective illustration of an ultrasound applicator for mediating drug delivery according to the invention;

5      FIG. 2 is a partially cross-sectional side view of the transducer head of the apparatus of FIG. 1;

FIG. 3 is a schematic, perspective view of a drug dosage dispenser for use in conjunction with the transducer head assembly of FIG. 2;

10      FIG. 4 is a schematic, perspective illustration of an alternative embodiment of an ultrasound-mediated drug delivery apparatus according to the invention;

FIG. 5 is a schematic, cross-sectional front view of the apparatus of FIG. 4;

15      FIG. 6 is a top view of the drug receptacle assembly of the apparatus of FIG. 4;

FIG. 7 is a schematic illustration of a dosage dispenser for use in connection with the apparatus of FIG. 4;

20      FIG. 8 is a schematic side view of an ultrasound applicator coupled to the apparatus to FIG. 4;

FIG. 9 is another alternative embodiment of the invention, employing a belt and integrated ultrasound transducer arrangement;

25      FIG. 10 is another alternative embodiment of the invention, employing a condom-like sheath and a toroidal ultrasound transducer arrangement;

FIG. 11 is a cross-sectional top view of the apparatus of FIG. 10;

30      FIG. 11A is a schematic illustration of constructive interference patterns treated by multiple transducers disposed in the toroidal arrangement of FIG. 11;

FIG. 12 is a schematic block diagram of an ultrasound transducer control system  
35      according to the invention; and

FIG. 13 is a graph of amplitude versus time, illustrating a variable frequency protocol for the application of ultrasound to enhance transdermal penetration, according to the invention.

## 5 **Detailed Description of the Invention**

FIG. 1 illustrates a system 10 for ultrasound-mediated drug delivery, including a hand held probe 12, a transducer head assembly 14, a therapeutic agent dispenser 16, control switch 18 and an optional power cord 32 for connection to an external power source and/or auxiliary control circuitry.

10 In FIG. 2, a partially cross-sectional view of transducer head assembly 14 of FIG. 1 is shown including an ultrasound transducer 20 which can be formed by piezoelectric elements 22 and 24. Electrical lead wires 30A and 30B provide power and, optionally, a modulation or frequency control signals to the transducer elements. The electrical leads (or separate circuitry) can also carry feedback control signals picked-up  
15 by the transducers (in a monitoring mode) and convey such signals back to a controller (as discussed below). In addition, the body 26 of the transducer head can be constructed of a compliant polymeric material in order to conform to the tissue surface undergoing treatment, and can also include an internal cavity having walls 28 that reflect and/or focus the ultrasound energy to a desired site beneath the applicator. The transducer head  
20 assembly, in use, can also include a dosage dispenser 16 which applies the topical agent to the skin where transdermal penetration is desired. As shown in FIG. 2, the body of the transducer head assembly 26 can further include a snap-on coupler (e.g., a ring-like ridge) to facilitate coupling of the dosage dispenser 16 to the head assembly 14.

FIG. 3 provides a further illustration of a drug dosage dispenser 16 for use in  
25 conjunction with the transducer head assembly of FIG. 2. The dosage dispenser 16 includes a semi-rigid casement 36 having a rim or ridge coupler 38 which cooperates with the mating element 34 on the transducer head assembly to deploy and secure the dosage dispenser. The dosage dispenser 16 further includes a therapeutic agent 40, possibly together with additional physiologically-acceptable carriers, solvents or  
30 transdermal enhancing agents. The dispenser 16 of FIG. 3 can further include a peel off covering (not shown) to maintain sterility of the therapeutic agent until it is applied to the skin. The drug dispenser 16, if a snap-in coupling is employed, can also include one or more tab elements (not shown), to assist in detachment of the dispenser following the ultrasound-mediated therapy.

35 In FIG. 4 an alternative embodiment particularly useful in treating erectile dysfunction. The system 10B of FIGS. 4-8 includes a belt 42 which facilitates placement of the device around the penis of a subject. Connected to the belt 42 is a drug

dispenser housing 44. The system can further include a cinch mechanism 46 to hold the system in contact with the subject's skin. Alternatively, the belt element can be a strap, optionally provided with an adjustment means, such as a slidable clasp, or other adjustable closure, for adjusting the fit of the device. Belt 42 can also be a band of an elastic material sized to provide a conforming fit for the user.

As shown in more detail in FIGS. 5, 6 and 7 the drug dispenser housing 44 can include walls 48 which define a receptacle 52 for a therapeutic agent 40B. The agent can be delivered as a gel or as a semi-solid block of medication. Alternatively, therapeutic agent 40B can be delivered in a dispenser casement similar to that described above in connection with the embodiment of FIGS. 1-3.

The apparatus 10B of FIGS. 4-7 is designed to cooperate with a ultrasound applicator as shown in FIG. 8. The applicator includes a transducer head assembly 14B which is sized and shaped to couple with the receptacle 52 or drug dispenser housing 44. When the therapeutic agent 40B is disposed within the receptacle, in contact with the skin, the ultrasound applicator and transducer head 14B can then be applied to agent 40B or housing 44 to effect transmission of ultrasonic waves (and penetration of the agent) through the skin as shown in FIG. 8.

Another embodiment of a device of the invention is depicted in FIG. 9. As shown in FIG 9, the device 10C can include an attachment means 43 for securing a miniaturized ultrasound source 14C to the penis of a user. Attachment means 43 can be a strap or an elastic band or belt similar to the belt and cinch mechanism described above in connection with the embodiment of FIGS. 4-8. Ultrasound source 14C includes a housing 27 for containing an ultrasound transducer, microelectronic circuitry suitable for controlling the operation of the ultrasound transducer, and, preferably, a power source such as a battery. The housing 27 is preferably constructed of a strong, durable, preferably compliant material; e.g., a plastic material such as a polyethylene, silicone or polyurethane composition, which advantageously also provides electrical insulation to protect the user against electrical shock.

In the embodiment of FIG. 9, housing 27 is provided with a slot 29 for receiving a source of the drug to be applied to the skin of the user. The drug composition, such as a gel or cream, can be dispensed by the user into the slot 29 before the device is used. In another embodiment, the drug is adsorbed or contained in unit dosage form as a patch, e.g., a transdermal patch, and the patch is sized to releasably and replaceably fit within slot 29. In such an embodiment, the patch is preferably designed for one-time use, with a suitable single dose of the active agent, and then discarded after use. This embodiment provides a reliable metering of the drug and is convenient and simple to use while maintaining appropriate cleanliness of the device. The miniaturized device of FIG. 9 is

- 14 -

preferably light weight and can, in one embodiment, present a rounded shape and low profile so as to not interfere with sexual intercourse. The device 10C can also be integrated into, or otherwise coupled to, a condom, if desired.

The embodiment of FIG. 9 depicts ultrasound source 14C with switch means 18  
5 for controlling operation of the device, e.g., an on/off switch. The device can also be provided with one or more additional buttons 19 for allowing the user to adjust the operating parameters of the device (e.g., the frequency, duty cycle, or duration of the ultrasound energy application). The device 10C can further include one or more  
10 pressure transducers 21 to monitor the tumescence of the penis, thereby allowing discontinuance of the ultrasound energy when the penis has become erect (or reinitiation or the system in the event that the erection is lost).

FIG. 10 illustrates yet another alternative system 10D for ultrasound-mediated drug delivery. The system 10D of FIG. 10 includes a toroidal transducer head assembly 14D having an hollow interior 60. The transducer assembly 14C can be activated by on-  
15 board batteries and/or a microprocessor element incorporated into the body of the transducer assembly 14D. Alternatively, an external power supply and/or external control circuitry can be applied to the device via electrical connection 32. As shown in more detail in FIGS. 10 and 11, the system 10C is designed to cooperate with a ring-like or condom-like sheath which is first applied to the penis. The sheath 56 includes a skin  
20 58 and an internal coating of the therapeutic agent 40C. As illustrated in FIG. 10, the therapeutic agent can coat most or all of the sheath 56. Alternatively, the therapeutic agent can be confined to that portion of the sheath which is disposed between the transducer assembly 14 and the penis. In FIG. 11 a toroidal arrangement of transducer elements 20D is illustrated. These transducer elements can be coupled together by  
25 electrical leads 30A and 30B. Also shown in phantom in the cross-sectional illustration of FIG. 11 is the sheath element 56 having its internal drug coating.

FIG. 11A illustrates the particular advantage of employing a toroidal arrangement of transducers. FIG. 11 shows a partial toroidal arrangement of transducer elements 20', 20" and 20''' and the interaction of their ultrasonic waves as they propagate  
30 into the stratum corneum. As the waves overlap each other, areas of constructive interference are created to locally increase the magnitude of the wave. This modulation is particularly useful in inducing temporary cavitation, one of the principal mechanisms for ultrasound-mediated transdermal penetration.

FIG. 12 illustrates a control system which can further ensure optimal ultrasound  
35 mediation. The system includes a power supply 60, a variable wave generator 64, stored instructions 65 or user input 66 and a piezoelectric oscillator 68. The system can further include a detector 62 and/or microprocessor 63 to monitor any feedback signals picked

up the piezoelectric oscillator in a receiver-mode and/or provide control signals based on such feedback signals, prestored instructions or user inputs.

FIG. 13 illustrates the advantages of variable frequency ultrasound application. By modulating the frequency between a relatively longer wavelength region 70 and a shorter wavelength region 72, constructive interference can again be induced in the strata corneum, also enhancing cavitation.

The power, frequency, and duty cycle of the ultrasound energy should be selected to be sufficient to promote transdermal penetration of topical applied agents while substantially avoiding undesirable side effects such as heating or disruption of tissue. Thus, in certain embodiments, the ultrasound energy is applied in the frequency range of about 20 kHz to about 5 MHz, more preferably about 100 kHz to about 4 MHz, and still more preferably from about 500k Hz to about 3 MHz, and preferably at a power of about 0.02 to about 3 watts/cm<sup>2</sup>, more preferably about 0.2 to about 2 watts/cm<sup>2</sup>, and still more preferably 0.5 to about 1.5 watts/cm<sup>2</sup>. The ultrasound energy should be applied for a time sufficient to achieve the desired therapeutic result (i.e., treatment of erectile dysfunction) while avoiding tissue damage or discomfort to the subject. For treatment of erectile dysfunction, the time period for application should be relatively short. For other therapies, such a muscle sprains or hair loss therapy, the treatment can be longer. Exemplary time periods for application of ultrasound energy to the tissue of the subject can range from about 1 minute to about 2 hours, more preferably from about 2 minutes to about 1 hour, still more preferably about 5 minutes to about 30 minutes.

The duty cycle of the ultrasound source should preferably be from about 10% to about 60%, more preferably from about 20% to about 50%. It will be appreciated in light of the teaching herein that the power, duty cycle, and frequency of the ultrasound can be varied to achieve a desired therapeutic result without causing tissue damage such as burning. For example, ultrasound at a frequency of about 20 kHz can cause skin burns is applied at excessive power levels for extended periods of time. Thus, when a frequency of 20 kHz is employed, it is preferable to use a duty cycle and power level (e.g., 0.02 W/cm<sup>2</sup>) that will minimize tissue damage. For exemplary details on the construction and operation of ultrasonic applicators the teachings of U.S. Patent No. 5,618,275 issued to Bock on April 8, 1997; U.S. Patent No. 5,421,275 issued to Lipkovker on June 6, 1995; and/or U.S. Patent No. 5,267,985 issued to Shimada et al. on December 7, 1993 are incorporated herein by reference. One of ordinary skill in the art will be able to select appropriate power levels, duty cycles, and frequencies of ultrasound using no more than routine experimentation.

The invention has reduced to practice and the principles of the invention have been proven by animal experiments. In these experiments, male dogs, one year old, were anesthetized and a midline abdominal incision was made from the xyphoid process down to the symphysis pubis. Proceeding slightly lateral to the left side of the penis, the corpus cavernosum was exposed. Two butterfly needles were placed into one of the corpus cavernosum, one proximally and one distally. The proximal needle was used for intracorporal pressure recordings, while saline was infused through the distal needle. Controlled intracorporal blood pressure (without applying any drugs) was monitored and recorded while saline was perfused at a rate of 1.7ml/min. Nude mice skin was used to cover the exposed corpora by stitching it to the dog's incised skin. A gel containing 500 mg papaverine (in a base of polyethylene glycol, methyl paraben, butyl paraben, and butylated hydroxytoluene) was applied on the surface of the nude mice skin followed by the application of an ultrasound probe of 1 MHz, pulse mode 30%, at a power level of 2 w/cm<sup>2</sup>, for 20 min. In the control experiments, papaverine was applied topically without any ultrasound application and the manometric pressure was monitored. The resulting manometric pressure was compared to the control pressure by measuring the time needed to reach the peak pressure and the time needed for the cavernosal pressure to decline to baseline.

Perfusion of the corpora with saline (with no ultrasound or papaverine application) was performed for 15 sec at a rate of 1.7 ml/min. creating a pressure ranging from 150-220 cm. H<sub>2</sub>O. The time needed for this pressure to drop to baseline (0-5) was 30 sec. Perfusion of the corpora with saline after applying ultrasound and papaverine reached the same pressure peak in only 5 sec. Moreover, the pressure declined to baseline in 1.5 minutes. Applying only papaverine (no ultrasound) on the skin for 20 min. gave the same results as in the control experiments, where only saline was perfused.

The experimental results demonstrate an absence of topical effect for papaverine alone; that is, papaverine gel, without application of ultrasound, resulted in no greater pressure readings than the no-drug control. These findings are consistent with the human clinical experience, suggesting that penetration of the drug from the skin surface to the corpus cavernosum is insufficient to provide effective therapy in the absence of an enhancer of drug penetration or absorption. However, the addition of the ultrasound treatment was able to create a rise in pressure which was consistent with erection. Therefore, these results indicate that ultrasound enhanced the permeability of papaverine into the corpus cavernosum tissue, increasing arterial inflow and affecting the resistance to venous outflow. The effects of papaverine were achieved with a 300% improvement in the period of time established as a baseline for the establishment of erection.



- 17 -

Furthermore, the effects were 500% more persistent than with the baseline erection parameters.

The contents of all references, patents, and published patent applications cited throughout this application, including the background, are hereby incorporated by  
5 reference.

Those skilled in the art will recognize, or be able to ascertain using no more than routine experimentation, numerous equivalents to the specific procedures described herein. Such equivalents are considered to be within the scope of this invention and are covered by the following claims.

10 Other embodiments are within the following claims.

**CLAIMS****What is claimed is:**

- 5 1. A device for transdermal administration of topical therapeutic agents, comprising an applicator for applying an effective amount of a therapeutic agent to a tissue surface of a subject; and  
an ultrasound transducer, operatively coupled to the applicator, for providing  
10 ultrasound energy to the tissue surface at at least one predetermined frequency to promote transdermal absorption of the drug through the tissue of the subject.
2. The device of claim 1, wherein the ultrasound transducer further comprises at least one oscillating element capable of generating ultrasound energy at a frequency of  
15 between 20 kHz and 5 MHz.
3. The device of claim 1, wherein the ultrasound transducer further comprises at least one oscillating element capable of generating ultrasound energy at a power of about 0.02 to about 3 watts/cm<sup>2</sup>.  
20
4. The device of claim 1, wherein the device further comprises a controller for varying the frequency of the ultrasound energy.
5. The device of claim 1, wherein the device further comprises a controller for  
25 varying the power of the ultrasound energy.
6. The device of claim 1, wherein the device further comprises a compliant skin contacting material.
- 30 7. The device of claim 1, wherein the applicator further comprises a receptacle for drug dispensal.
8. The device of claim 1, wherein the applicator further comprises a skin patch carrying a pre-defined dosage of the agent.  
35
9. The device of claim 1, wherein the applicator further comprises a condom carrying a pre-defined dosage of the agent.

10. The device of claim 1, wherein the applicator further comprises a cap adapted for placement on a subject's head carrying a pre-defined dosage of the agent.
- 5 11. The device of claim 1, wherein the applicator further comprises a cartridge containing a pre-defined dosage of the agent.
12. The device of claim 1, wherein the applicator further comprises a dispenser cartridge with a connector for coupling the dispenser to the transducer.
- 10 13. The device of claim 1, wherein the applicator further comprises a reservoir of the agent and a flow regulator for applying a pre-defined dosage of the agent.
14. The device of claim 1, wherein the device further comprises a pressure  
15 transducer for monitoring changes in the tissue during therapy.
15. The device of claim 1, wherein the device further comprises a ring-like structure adapted to surround the tissue surface.
- 20 16. The device of claim 1, wherein the device further comprises a plurality of ultrasound transducers.
17. The device of claim 16, wherein the plurality of ultrasound transducers are arranged to provide constructive wave interference.
- 25 18. The device of claim 16, wherein the plurality of ultrasound transducers are arranged in a toroidal configuration.
19. The device of claim 1, wherein the device further comprises a detector for  
30 monitoring feedback signals from the transducer.
20. The device of claim 1, wherein the device further comprises a battery for power supply.

- 20 -



21. A method for treating erectile dysfunction, the method comprising:  
contacting a tissue surface of a male subject in need of such treatment with an  
effective amount of an agent capable of capable of treating erectile  
dysfunction; and  
5 applying ultrasound energy to the tissue surface, such that the erectile  
dysfunction is treated.
22. The method of claim 21, wherein the tissue surface is a skin surface of the penis.
- 10 23. The method of claim 21, wherein the step of contacting comprises applying the  
active agent to the tissue surface with a skin patch carrying the active agent.
24. The method of claim 21, wherein the step of contacting comprises applying the  
active agent to the tissue surface from a reservoir of the active agent stored within a hand  
15 held applicator.
25. The method of claim 21, wherein the step of contacting comprises applying the  
active agent to the tissue surface from a dispenser coupled to an ultrasound transducer,  
and the step of applying ultrasound energy further comprises activating the transducer.  
20
26. The method of claim 21, wherein the step of contacting comprises applying the  
active agent to the tissue surface with a condom coated with the active agent.
27. The method of claim 21, wherein the agent capable of treating erectile  
25 dysfunction is selected from the group consisting of phosphodiesterase inhibitors,  
vasoactive agents, papaverine, minoxidil, prostaglandins, organic nitrites, inhibitors of  
the renin-angiotensin system, and inducible Nitric Oxide Synthase (iNOS) agents.
28. The method of claim 27, wherein the phosphodiesterase inhibitor is sildenafil.  
30
29. The method of claim 27, wherein the phosphodiesterase inhibitor is alprostadil.
30. The method of claim 21, wherein the step of applying ultrasound energy  
comprises applying ultrasound energy at a frequency ranging from about 20 kHz to  
35 about 5 MHz and at a power of about 0.02 to about 3 watts/cm<sup>2</sup>.

31. A method for treating muscle inflammation, the method comprising:  
contacting a tissue surface overlying an inflamed muscle region with an effective  
amount of an agent capable of treating muscle inflammation; and  
applying ultrasound energy to the tissue surface, such that the agent is transported  
5 transdermally to the muscle tissue and the inflammation is treated.
32. The method of claim 31, wherein the step of contacting comprises applying the  
active agent to the tissue surface with a skin patch carrying the active agent.
- 10 33. The method of claim 31, wherein the step of contacting comprises applying the  
active agent to the tissue surface from a reservoir of the active agent stored within a hand  
held applicator.
- 15 34. The method of claim 31, wherein the step of contacting comprises applying the  
active agent to the tissue surface from a dispenser coupled to an ultrasound transducer,  
and the step of applying ultrasound energy further comprises activating the transducer.
- 20 35. The method of claim 31, wherein the agent capable of treating muscle  
inflammation is selected from the group consisting of analgesics, anti-inflammatory  
agents, and steroids.
36. The method of claim 31, wherein the agent is a cortisone derivative.
- 25 37. The method of claim 31, wherein the step of applying ultrasound energy further  
comprises applying ultrasound energy at a frequency ranging from about 20 kHz to  
about 5 MHz.
- 30 38. The method of claim 31, wherein the step of applying ultrasound energy further  
comprises applying ultrasound energy at a power of about 0.02 to about 2 watts/cm<sup>2</sup>.
39. The method of claim 31, wherein the step of applying ultrasound energy further  
comprises applying ultrasound energy with a plurality of ultrasound transducers  
arranged to provide constructive wave interference.
- 35 40. The method of claim 31, wherein the step of applying ultrasound energy further  
comprises applying ultrasound energy and varying the frequency of ultrasonic  
oscillations during the application.

41. A method for treating hair loss comprising:  
contacting a tissue surface of a subject in need of such treatment with an effective  
amount of an agent capable of inhibiting hair loss; and  
5 applying ultrasound energy to the tissue surface, such that the agent is transported  
transdermally to a subdermal region proximal to a dormant hair follicle papilla stimulate  
activity of the dormant papilla.
42. The method of claim 41, wherein the tissue surface is the scalp.  
10
43. The method of claim 41, wherein the step of contacting comprises applying the  
active agent to the tissue surface with a cap coated with the active agent.
44. The method of claim 41, wherein the step of contacting comprises applying the  
15 active agent to the tissue surface from a reservoir of the active agent stored within a hand  
held applicator.
45. The method of claim 41, wherein the step of contacting comprises applying the  
active agent to the tissue surface from a dispenser coupled to an ultrasound transducer,  
20 and the step of applying ultrasound energy further comprises activating the transducer.
46. The method of claim 41, wherein the agent capable of treating muscle  
inflammation is selected from the group consisting of minoxidil, finasteride, fabao-101,  
cyproterone acetate, ethinyl estradiol, aldactone and spironolactone.  
25
47. The method of claim 41, wherein the agent is minoxidil derivative.
48. The method of claim 41, wherein the step of applying ultrasound energy further  
comprises applying ultrasound energy at a frequency ranging from about 20 kHz to  
30 about 5 MHz and at a power of about 0.02 to about 2 watts/cm<sup>2</sup>.
49. The method of claim 41, wherein the step of applying ultrasound energy further  
comprises applying ultrasound energy with a plurality of ultrasound transducers  
arranged to provide constructive wave interference.  
35


- 23 -

50. The method of claim 41, wherein the step of applying ultrasound energy further comprises applying ultrasound energy and varying the frequency of ultrasonic oscillations during the application.

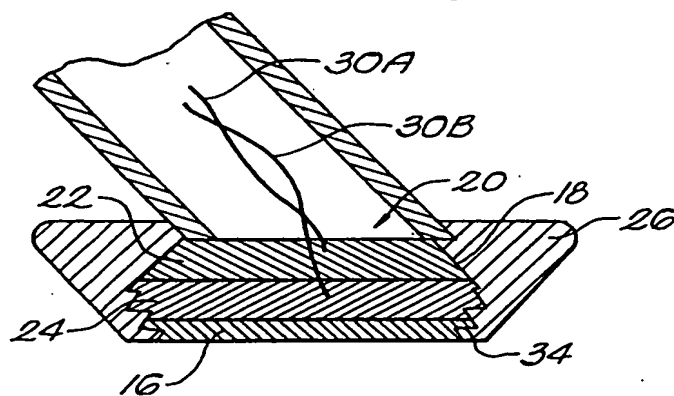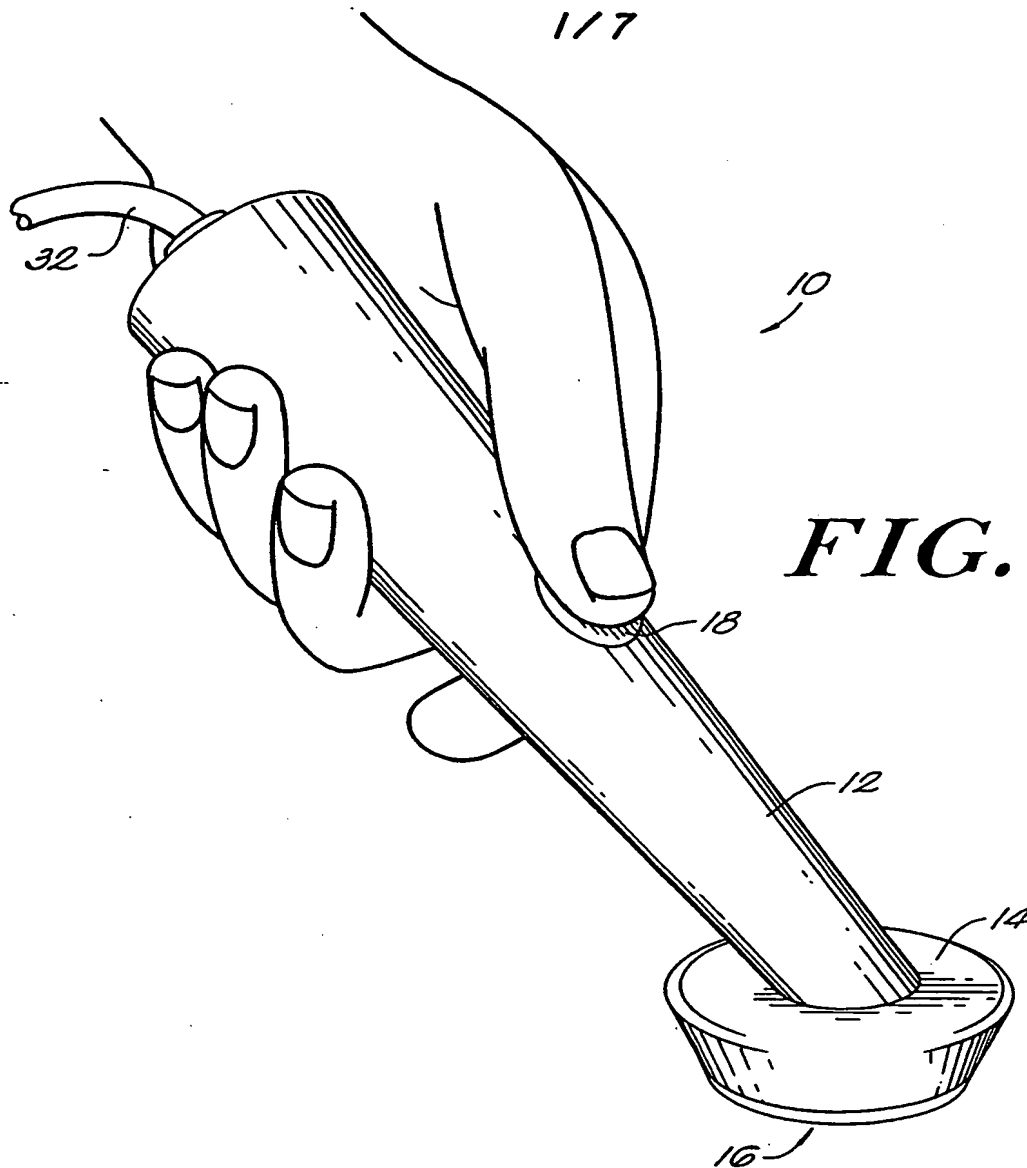





2 / 7

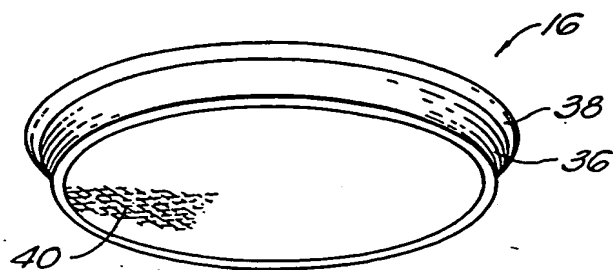

**FIG. 3**

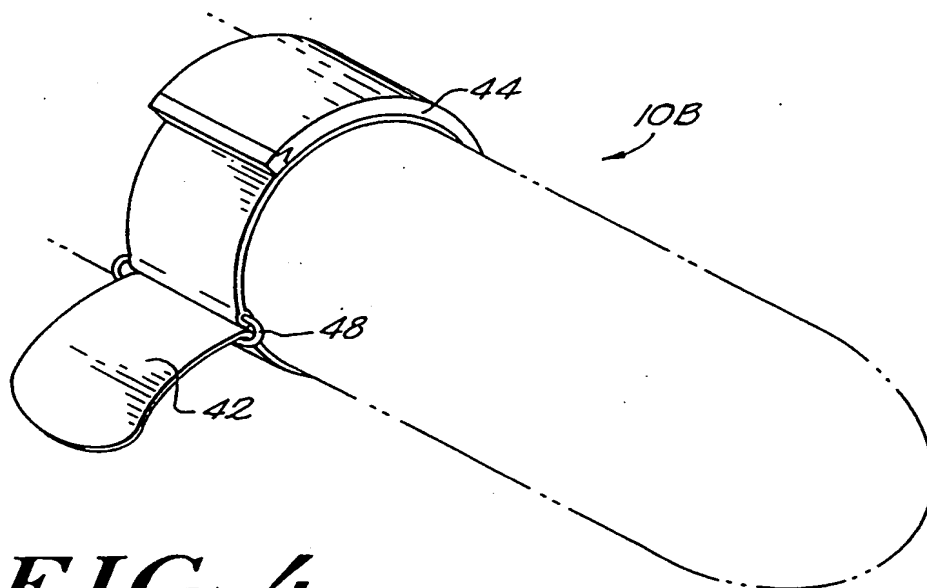


**FIG. 4**

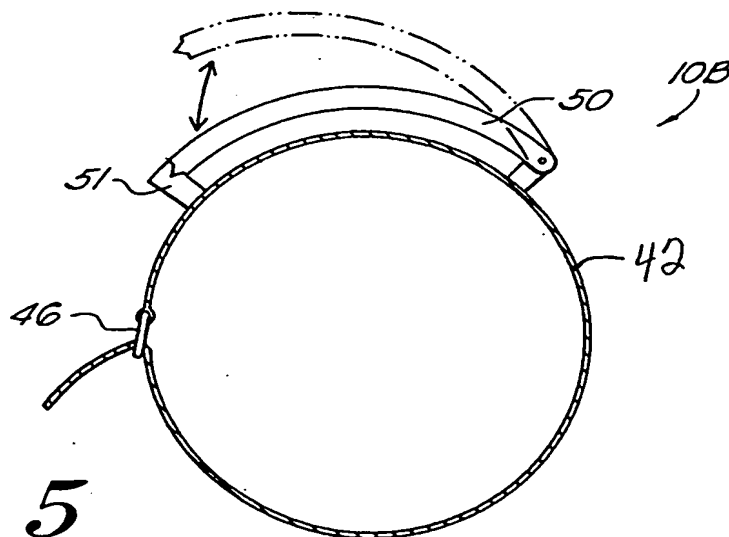


**FIG. 5**


3/7

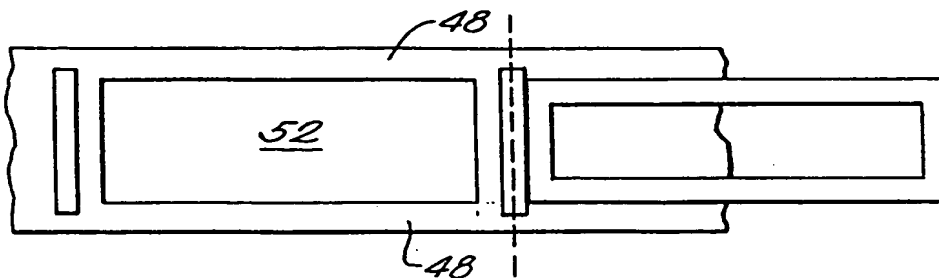


**FIG. 6**

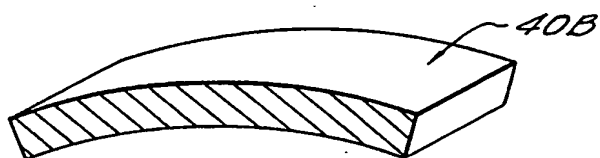


**FIG. 7**

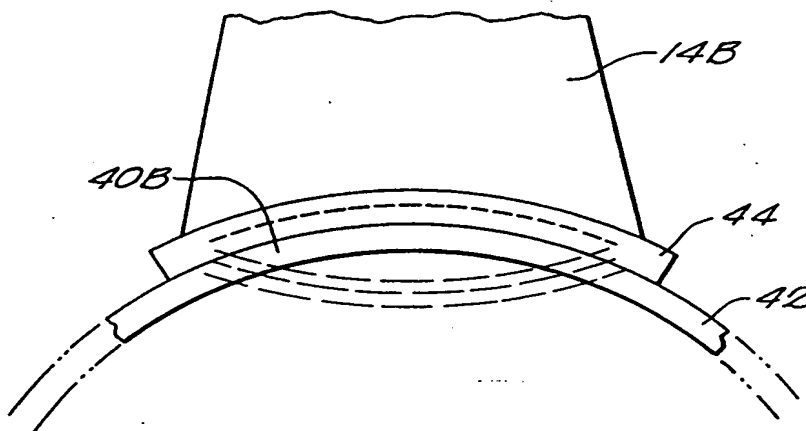

**FIG. 8**

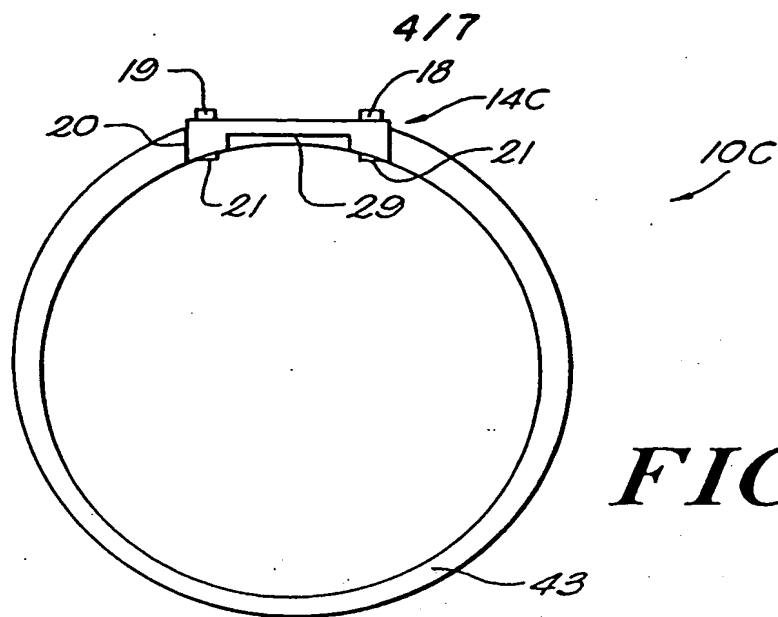


**FIG. 9**

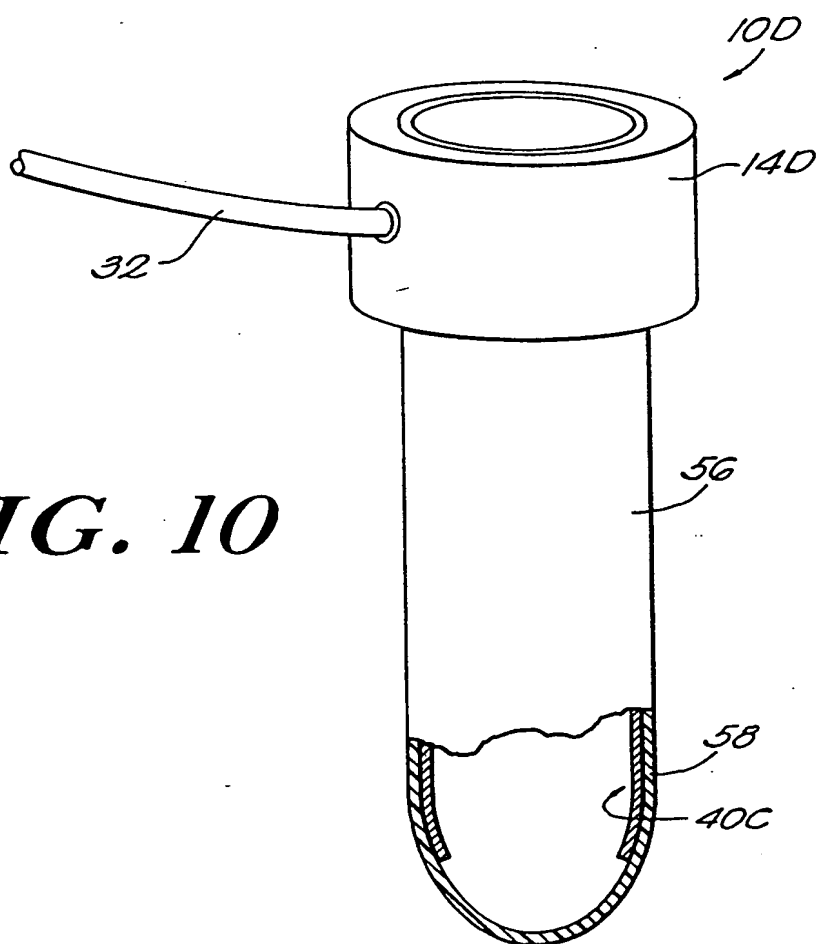


**FIG. 10**

5 / 7

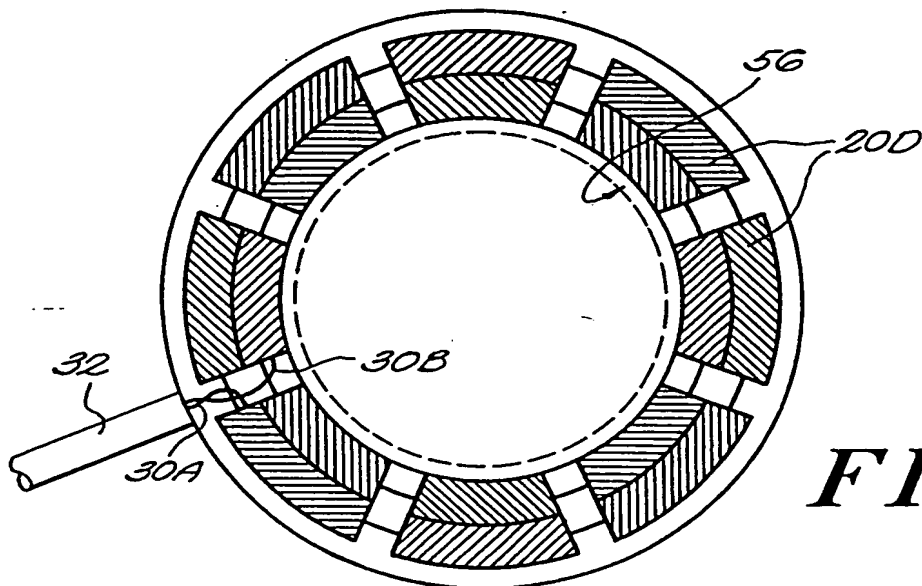


**FIG. 11**

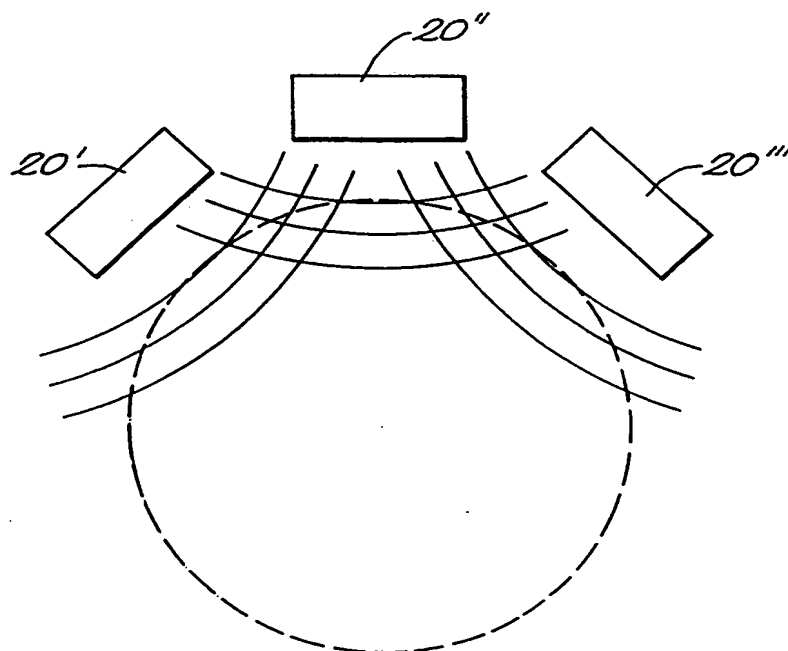


**FIG. 11A**

6 / 7

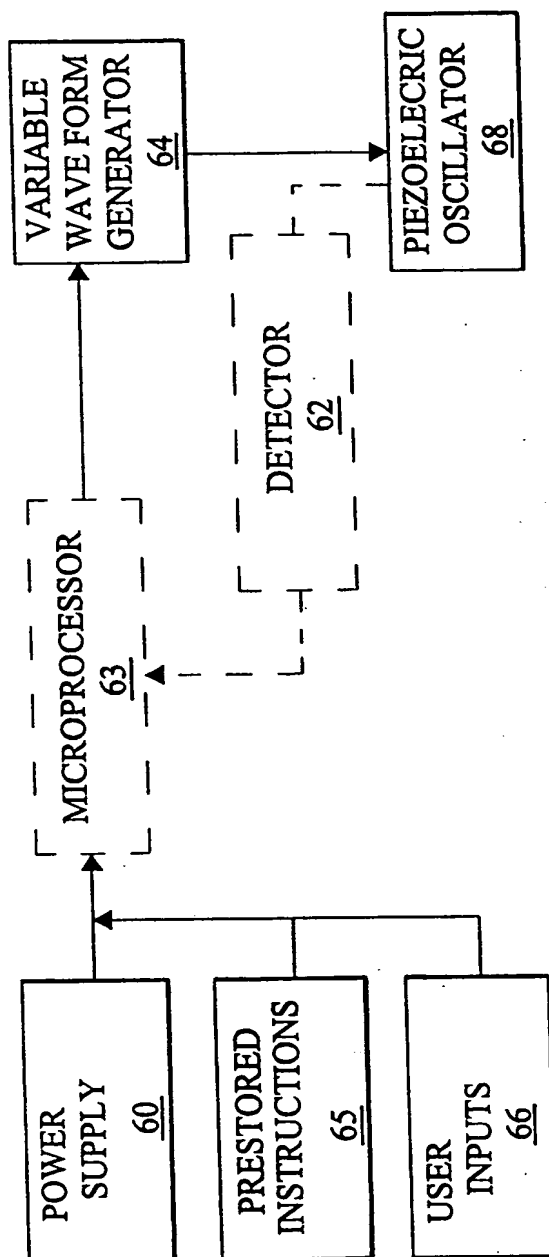*FIG. 12*

7/7

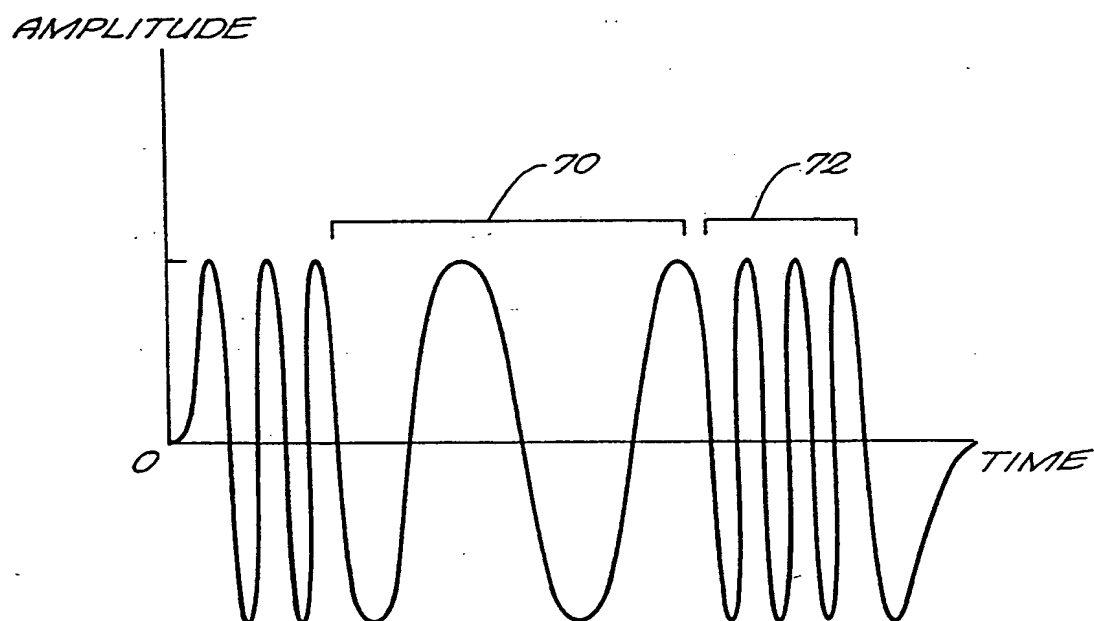***FIG. 13***

## INTERNATIONAL SEARCH REPORT

International Application No. PCT/US 99/02701

A. CLASSIFICATION OF SUBJECT MATTER		
A 61 M 37/00		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
A 61 M		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5421816 A (LIPKOVER, L.M.) 06 June 1995, abstract, column 4, line 46 - column 5, line 26, column 5, lines 49-51, column 9, line 61 - column 10, line 68, column 11, line 55 - column 12, line 7, column 12, line 38 - column 13, line 4, column 18, lines 37-52, fig. 5-11,28.	1-8, 11,16, 17
A		13,14, 21,31, 41
X	US 5618275 A (BOCK, R.) 08 April 1997, the whole document.	1-4,6, 7
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
21 June 1999		22 07 1999
Name and mailing address of the ISA European Patent Office, P.O. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl. Fax (+ 31-70) 340-3016		Authorized officer  LUDWIG e.h.

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 99/02701

-2-

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>especially column 1, lines 35-39, column 4, lines 1-58, column 5, lines 23-38, fig. 2A, 2B (cited in the application).</p> <p>--</p>	21, 31, 41
X	<p>US 5267985 A (SHIMADA, J. et al.) 07 December 1993, the whole document, especially column 5, lines 39-45, column 6, line 6 - column 7, line 17 (cited in the application).</p> <p>--</p>	1, 2, 4, 6, 7, 16, 17, 20
A		21, 31, 41
X	<p>US 5445611 A (EPPSTEIN, J. et al.) 29 August 1995, abstract, column 7, lines 10-56, claims 1-9, 11-17, 19.</p> <p>--</p>	1-5, 16, 17
A		21, 31, 35, 36-38, 40, 41
X	<p>EP 0278074 A2 (TACHIBANA, S. et al.) 17 August 1988, the whole document, especially page 3, line 35 - page 4, line 42, page 8, line 3 - page 9, line 8, claims 1-8, fig. 1-4b.</p> <p>--</p>	1, 2, 4-8, 20
Y A		3 21, 31, 41
X	<p>US 5171215A A (FLANAGAN, D.F.) 15 December 1992, the whole document.</p> <p>--</p>	1, 2, 7, 12
Y A		3 13, 14, 21, 31, 41
Y	<p>EP 0736305 A2 (CYGNUS, INC. et al.) 09 October 1996,</p> <p>--</p>	3



# INTERNATIONAL SEARCH REPORT

International Application No.

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

PCT/US 99/02701

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>column 8, lines 13-16. --</p> <p>US 4767402 A (KOST, J. et al.) 30 August 1988, column 3, lines 9-37, column 4, lines 25-40, column 4, line 58 - column 5, line 11.</p>	1-6,8
A	<p>--</p>	21,31, 41
A	<p>EP 0634189 A2 (TACHIBANA, K. et al.) 18 January 1995, abstract.</p> <p>----</p>	1-4

## ANHANG

## ANNEX

## ANNEXE

aus internationalen Recherchen-  
bericht über die internationale  
Patentanmeldung Nr.

to the International Search  
Report to the International Patent  
Application No.

au rapport de recherche inter-  
national relatif à la demande de brevet  
international n°

PCT/US 99/02701 SAE 228611

In diesem Anhang sind die Mitglieder  
der Patentfamilien der im obenge-  
nannten internationalen Recherchenbericht  
angeführten Patentdokumente angegeben.  
Diese Angaben dienen nur zur Unter-  
stützung und erfolgen ohne Gewähr.

This Annex lists the patent family  
members relating to the patent documents  
cited in the above-mentioned inter-  
national search report. The Office is  
in no way liable for these particulars  
which are given merely for the purpose  
of information.

La présente annexe indique les  
membres de la famille de brevets  
relatifs aux documents de brevets cités  
dans le rapport de recherche inter-  
national visé ci-dessus. Les renseigne-  
ments fournis sont donnés à titre indica-  
tif et n'engagent pas la responsabilité  
de l'Office.

In Recherchenbericht angeführtes Patentdokument Patent document cited in search report Document de brevet cité dans le rapport de recherche	Datum der Veröffentlichung Publication date Date de publication	Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets	Datum der Veröffentlichung Publication date Date de publication
US A 5421816	06-06-1995	AU A1 53591/94 AU B2 678781 CA AA 2146010 EP A1 684856 JP T2 8502424 WO A2 9408655 WO A3 9408655 US A 5617851	09-05-1994 12-06-1997 28-04-1994 06-12-1995 19-03-1996 28-04-1994 01-09-1994 08-04-1997
US A 5618275	08-04-1997	AU A1 75969/96 WO A1 9715232	15-05-1997 01-05-1997
US A 5267985	07-12-1993	keine - none - rien	
US A 5445611	29-08-1995	US A 5885211 WO A1 9707734 AU A1 68631/96 EP A1 858285 GB A0 9702766 GB A1 2307414 GB B2 2307414 IL A0 123379 NO A0 980878 NO A 980878 US A 5458140 US A 5722397 CA AA 2199002 CA C 2199002 CN A 1195276	23-03-1999 06-03-1997 19-03-1997 19-08-1998 02-04-1997 28-05-1997 11-03-1998 24-09-1998 27-02-1998 27-04-1998 17-10-1995 03-03-1998 01-03-1997 23-02-1999 07-10-1998
EP A2 278074	17-08-1988	AT E 88100 AT E 119021 DE C0 3785442 DE T2 3785442 DE C0 3751121 DE T2 3751121 EP A3 278074 EP A1 495531 EP B1 278074 EP B1 495531 EP T3 2039409 EP T3 3008251 JPP A2 63135179 JPP B4 3063913 KR B1 9004318 US A 4821740 US A 4953565 US A 5007438	15-04-1993 15-03-1995 19-05-1993 16-09-1993 06-04-1995 22-06-1995 26-07-1989 22-07-1992 14-04-1993 01-03-1995 01-10-1993 30-09-1993 07-06-1988 03-10-1991 22-06-1990 18-04-1989 04-09-1990 16-04-1991
US A 5171215	15-12-1992	keine - none - rien	
EP A2 736305	09-10-1996	AT E 148001 AU A1 74883/91 AU B2 656519 CA AA 2075624 CA C 2075624 DE C0 69124365 DE T2 69124365 EP A1 515566 EP A4 515566 EP B1 515566 EP A3 736305 EP T3 2097206 FI A 923743 FI A0 923743 JP T2 6501855 JP B2 2695986 NO A 923254 NO A0 923254 NZ A 237197 PT A 96856 US A 5115805 WO A1 9112772 US A 5231975 US A 523769 US A 5636632	15-02-1997 18-09-1991 09-02-1995 24-08-1991 18-11-1997 06-03-1997 28-05-1997 02-12-1992 03-02-1993 22-01-1997 19-08-1998 01-04-1997 20-08-1992 20-08-1992 03-03-1994 14-01-1998 19-08-1992 19-08-1992 24-04-1997 29-11-1991 26-05-1992 05-09-1991 03-08-1993 28-06-1994 10-06-1997
US A 4767402	30-08-1988	CA A1 1324051 EP A1 275284	09-11-1993 27-07-1988

JP	T2	1500247	12-02-1989
JP	B2	2710281	10-02-1998
WO	A2	8800001	14-01-1988
US	A	4948587	14-08-1990
US	A	4657543	14-04-1987
US	A	4779806	25-10-1988
CA	A1	1291064	22-10-1991
EP	A1	2455355	19-11-1987
DE	C0	3685958	13-08-1992
DE	T2	3685958	14-01-1993
EP	TD	2455355	30-03-1989
EP	B1	2455355	08-07-1992

A2	634189	18-01-1995	EP	A3	634189	17-01-1996
			JP	A2	7024074	27-01-1995
			US	A	5720710	24-02-1998

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**